

11/10/99

PATENT APPLICATION TRANSMITTAL LETTER
(Large Entity)

Docket No.
2160 (FJ-99-2)

TO THE ASSISTANT COMMISSIONER FOR PATENTS

A

Submitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

Erland R. Sandstrom, Brigitte K. Weigert, Donald C. McCarthy, Michael G. Thomas & Michael Freek

For: **INJECTION BLOW-MOLDED DISPOSABLE TUMBLER AND METHOD OF MAKING SAME**

Enclosed are:

- ☒ Certificate of Mailing with Express Mail Mailing Label No. EJ486761210US
- ☒ 14 formal sheets of drawings.
- ☐ A certified copy of a application.
- ☒ Declaration ☐ Signed. ☒ Unsigned.
- ☒ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☒ Other: Unexecuted Assignment and Return Postal Card

JC542 U.S. PTO
09/437554
11/10/99

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	85	- 20 =	65	x \$18.00	\$1,170.00
Indep. Claims	19	- 3 =	16	x \$78.00	\$1,248.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
TOTAL FILING FEE					\$3,178.00

- ☐ A check in the amount of to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 50-0935 as described below. A duplicate copy of this sheet is enclosed.
 - ☒ Charge the amount of \$3,178.00 as filing fee.
 - ☒ Credit any overpayment.
 - ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
 - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: November 10, 1999

Michael W. Ferrell

Signature

Michael W. Ferrell, Esq. - Reg. No. 31,158
Ferrell & Ferrell, L.L.P.
90 Crystal Run Road, Suite 401
Middletown, New York 10941
Telephone (914) 695-1553
Facsimile (914) 695-1558

cc:

Express Mail Label No. EJ486761210US

Attorney Docket No. 2160 (FJ-99-36)

United States Provisional Patent Application of:

Erland R. Sandstrom,

Brigitte K. Weigert,

Donald McCarthy,

Michael G. Thomas,

and

Michael A. Freek

For:

INJECTION BLOW-MOLDED DISPOSABLE TUMBLER AND METHOD OF
MAKING SAME

INJECTION BLOW-MOLDED DISPOSABLE TUMBLER
AND METHOD OF MAKING SAME

5 This non-provisional patent application is based on the following provisional applications all filed within one year of the filing date of this application.

	<u>U.S. Serial No.</u>	<u>Title</u>	<u>Filing Date</u>
10	60/110,239	Low Taper Injection Blow-molded Tumbler	11/30/98
	60/110,240	Injection Blow-molded Disposable Tumbler	11/30/98
15	60/110,238	Large Volume Injection Blow-molded Tumbler	11/30/98
	60/146,352	Injection Blow-molded Polycarbonate Containers	8/2/99
20	60/146,354	Process for Injection Blow-molded Containers	8/2/99

25 The disclosures of the above applications are hereby incorporated into this application by reference thereto and the priority of the foregoing applications is claimed in accordance with 37 CFR 1.78.

Technical Field

30 The present invention relates generally to disposable tumblers and in particular to injection blow-molded tumblers of various configurations having a fortified rim at the upper extremity of the sidewall.

Background

Disposable polymeric articles for packaging, bowls and cups are well known. Such articles are formed of polystyrene, polypropylene, polyethylene terephthalate and the like and may be made by thermoforming, injection molding, injection blow-
5 molding, or other suitable technique. Injection molding has advantages in that a short cycle time is readily achieved, but tends to be more expensive in terms of material and articles so formed tend to have anisotropic properties and therefore exhibit brittleness. Thermoforming likewise tends to have advantageous cycle times, however, the waste generated tends to be excessive. Moreover, the draw which may
10 be imposed on the sheet is limited. United States Patent No. 5,693,278 discloses thermoformed articles produced from polyethylene terephthalate sheet. The excessive waste problem is addressed in the '278 patent by utilizing at least forty percent (40%) by weight recycled material.

15 United States Patent No. 5,433,337 of Willbrandt discloses an injection molded drink container to fit in vehicle cup holders. The container has an upper rim
20 with a height of from about 1/16 of an inch to about 1/10 of an inch and a width of from about 0.15 inches to about 0.25 inches. Note Col. 5 at lines 15-25. United States Patent No. 5,427,269 notes at Col. 5 that this type of container may be produced by
20 an suitable method, but that injection molding is preferred.

As noted hereinabove, injection molding tends to be expensive in terms of material, requiring relatively thick-walled parts to compensate for the anisotropy inherent in the production technique. Disposable containers are preferably made
25 utilizing as little material as possible.

Many consumers are generally reluctant to use conventional disposable drinking cups on a frequent basis due to their "look and feel", their expense, or their performance. Survey data indicate that consumers in many instances prefer

disposable articles whose appearance and performance more closely resemble glassware. Conventional disposable drinking cups produced by blow-molding typically rely upon a relatively prominent curled rim to provide rigidity to the article and accordingly, the article does not resemble glassware to the extent desired.

5 Moreover, even with the prominent top-curl, conventional blow-molded cups typically are not rigid enough to mimic glassware. Injection blow-molding processes and apparatus are widely known and widely used in industry. For example, reference may be had to U.S. Pat. No. 3,183,552 to *Farkas*, U.S. Pat. No. 3,819,314 to *Marcus*, U.S. Pat. No. 3,339,231 to *Piotrowski* and Canadian Pat. No. 995,418 to *Cannon et*
10 *al.*

It is known, in general, to use injection blow-molding of polycarbonates to produce an assortment of containers, see Kirk-Othmer Encyclopedia of Chemical Technology, Fourth Edition, Vol. 19, p. 600. Further, U.S. Patent No. 4,139,517
15 discloses reusable milk bottles composed of aromatic polycarbonates and is specifically directed to a tinted polycarbonate container to prevent milk spoilage caused by artificial light or sunlight. The patent discloses that the containers can be prepared by well-known techniques, such as extrusion blow-molding, injection blow-molding, rotational molding, thermoforming, injection molding and lamination. No
20 specific processing conditions for the mentioned molding techniques are given.

U.S. Patent Nos. 4,225,304; 4,230,298; 4,234,302 and 4,308,086, issued to *Valyi*, disclose a continuous process and apparatus for blow-molding, including injection blow-molding, containers formed of various plastics including
25 polycarbonates. Again, no specific process parameters for producing polycarbonate containers are provided. It is and has been a long standing objective of blow-molding processes to achieve a high productivity, i.e., to develop a process with a rapid, efficient and economical operating cycle.

State of the art processes known heretofore are subject to one or more significant disadvantages. Frequently, they are characterized by a relatively slow operating cycle. A shorter operating cycle is particularly desirable since it is directly translatable into a larger number of end products produced. Processes are known with overlapping cycles in order to reduce overall cycle time, for example, by providing that while one parison is being molded another is being blown and still another is being removed. However, even with processes using overlapping cycles the overall cycle time still leaves much to be desired and still necessitates improvement in cycle time. The foregoing difficulties are further compounded by frequent lack of reliability of prior art processes necessitating frequent interruptions of the operation and thereby further impairing operating efficiency.

U.S. Patent No. 4,540,543 assigned to Canada Cup, Inc., a subsidiary of Fort James Corporation, discloses an injection blow-molding process and apparatus for hollow plastic articles. The method and apparatus for injection blow-molding hollow plastic articles is characterized by a rapid and efficient operating cycle. The injection mold includes a mold cavity and the blow mold is located adjacent the mold cavity in a side-by-side relationship. The parison is injection molded into the mold cavity onto a core. The parison on the core is separated from the mold cavity by moving the parison on the core axially in a straight path away from the mold cavity, followed by movement in a substantially arcuate path into axial alignment with the blow mold, followed by axial movement in a straight path into the blow mold. The advantage of the method and apparatus of injection blow-molding disclosed in U.S. Patent No. 4,540,543 compared to previous injection blow-molding methods is in its reliability, preventing interruptions of the injection blow-molding operation and thereby improving efficiency. The method and apparatus as disclosed in U.S. 4,540,543 have been used to manufacture thin walled containers from polystyrene. In particular, disposable containers have been successfully produced from polystyrene. Such polystyrene containers are desirable because they are reusable and have aesthetic

clarity. However, for producing permanent ware products which have a nominal thickness typically over 50 mils, it has been found that polystyrene was not acceptable because of breakage. When producing blow-molded permaware containers, it is often useful to incorporate onto the base indicia indicating the origin of manufacture or provide other spatial configurations to the base to aid in subsequent processing steps such as printing or packaging. However, for relatively thick bases, the fluid pressure used in blow-molding is not sufficient to adequately press the parison base against a mold and form an adequately deep molded impression on the base. Previously, such base molding step was accomplished by removing the containers from the continuous blow-molding process and stamping the base of the containers in a wholly separate apparatus. Such separate processing adds significant energy and time costs to the overall process .

Accordingly, an object of the present invention is to provide a reusable permanent ware polycarbonate container prepared by injection blow-molding wherein the container mimics glass but is not as breakable when dropped under normal usage.

Another object of the present invention is to provide a reusable, permanent ware injection blow-molded polycarbonate container that has good clarity but is more durable than other plastic containers such as those formed from polystyrene.

A further object of the present invention is to provide a process for injection blow-molding hollow polycarbonate articles characterized by a rapid, efficient and economical operating cycle.

A still further object of the present invention is to provide a process as aforesaid which is convenient and easy to use on a commercial scale and may be reliably used with high productivity.

Still yet another object of the present invention is to provide a process for injection blow-molding hollow articles characterized by a rapid, efficient and economical operating cycle such as provided by U.S. 4,540,543, but use resins other than polystyrene.

5

A still further object of this invention is to blow mold hollow permaware containers and mold the base of such containers in a continuous process without having to remove the containers from the blow-molding apparatus.

10 Other objects and advantages of the present invention will become apparent from the following description and drawings.

Summary of Invention

15 In a first aspect of the invention there is provided an injection blow-molded disposable tumbler exhibiting biaxial toughness formed from a polymeric material comprising: a base forming the bottom of the tumbler defining an outer edge thereof; a sidewall integrally formed with said base extending upwardly from the outer edge thereof defining about its upper extremity a fortified rim.

20 In one preferred embodiment of the present invention there is provided an injection blow-molded disposable tumbler exhibiting biaxial toughness formed from a polymeric material including: a base forming the bottom of said tumbler defining an outer edge thereof; a sidewall integrally formed with the base extending upwardly from the outer edge thereof having a thickness of from about 5 to about 50 mils
25 defining about its upper extremity a fortified rim; the sidewall extending upwardly with a taper of from about 1.0 to about 4.5 degrees; wherein the fortified rim has a thickness of at least 2 mils greater than the adjacent portion of said sidewall over a height of at least 2 mils. More typically, the sidewall extends upwardly with a taper

004437594 "11059

of from about 2.75 to about 4 degrees; and preferably the sidewall extends upwardly with a taper of about 3 degrees. The fortified rim generally has a thickness and a height of from about 1.5 to about 6 times the thickness of the adjacent portion of the sidewall; with from about 3 to about 5 times the thickness of the adjacent portion of said sidewall being more typical. The tumbler is made from a polymer which is a thermoplastic optically clear polymer, with a haze value of less than 10, usually selected from the group consisting of polystyrene, clarified polypropylene, polyesters, polycarbonates, polyacrylates and styrene acrylonitrile. The volume of said injection blow-molded tumbler is generally from about 1.5 to about 4 times the volume of an injection molded parison from which it was prepared; however, a volume of from about 1.75 to about 3 times the volume of the injection molded parison from which it was prepared is more typical, while a volume of the tumbler of about twice the volume of the injection molded parison from which it was prepared is sometimes preferred. The sidewall has a thickness of from about 10 to about 35 mils, with from about 15 to about 25 mils being more common. A thickness of about 20 mils is preferred in many instances. The sidewall may further include a pattern which alters the cylindrical character thereof over at least a portion of the sidewall which pattern is operative as a grip portion for a user. A ratio of the height of the tumbler to the inside diameter of the upper portion of the sidewall is from about 2 to about 4 in some embodiments, for example, about 3. The tumbler may have a contained volume of from about 12 to about 15 ounces, or inner volume of about 14 ounces. In some embodiments, the tumbler has a height of from about 5.75 to about 6 inches.

In another embodiment, there is provided an injection blow-molded disposable tumbler exhibiting biaxial toughness formed of a polymeric material including: (a) a base forming the bottom of the tumbler defining an outer edge thereof; (b) a sidewall integrally formed with the base extending upwardly from the outer edge thereof having a thickness of from about 5 to about 50 mils defining about its upper extremity a fortified rim; (c) the sidewall extending upwardly with a taper of

from about 2.5 to about 10 degrees; wherein the fortified rim has a thickness of at least 2 mils greater than the adjacent portion of the sidewall over a height of at least 2 mils. The sidewall typically extends upwardly with a taper of from about 4.5 to about 10 degrees and preferably the sidewall extends upwardly with a taper of from about 4.5 to about 7.5 degrees. The fortified rim generally has a thickness and a height of from about 1.5 to about 6 times the thickness of the adjacent portion of the sidewall, with from about 3 to about 5 times the thickness of the adjacent portion of said sidewall being more typical. The tumbler is usually formed of optically clear polymer with a haze value of less than 10 selected from the group consisting of polystyrene, clarified polypropylene, polyesters, polycarbonates, polyacrylates and styrene acrylonitrile. The contained volume of the tumbler is generally from about 1.5 to about 4 times the volume of an injection molded parison from which it was prepared; while from about 1.75 to about 3 times the volume of the injection molded parison from which it was prepared is more typical. The tumbler is about twice the volume of the injection molded parison from which it was prepared. The tumbler sidewall has a thickness of from about 10 to about 35 mils in general, whereas, the sidewall has a thickness of from about 15 to about 25 mils in most embodiments. Particularly preferred articles are those wherein the sidewall has a thickness of about 20 mils. The said sidewall may further include a pattern which alters the cylindrical character thereof over at least a portion of said sidewall which pattern is operative as a grip portion for a user. The tumbler typically exhibits a ratio of the height of the tumbler to the inside diameter of the upper portion of the sidewall from about 1 to about 5; whereas from about 1.3 to about 1.7 is preferred. The height of the tumbler is from about 4.6 to about 4.8 inches and it has a typical volume of from about 12 to about 16 ounces; while about 15 fluid ounces is preferred in this embodiment.

In another embodiment, there is provided an injection blow-molded disposable tumbler exhibiting biaxial toughness formed of a polymeric material including; a base forming the bottom of the tumbler defining an outer edge thereof; a

sidewall integrally formed with the base extending upwardly from the outer edge thereof having a thickness of from about 5 to about 50 mils defining about its upper extremity a fortified rim; the sidewall extending upwardly with a taper of from about 1 to about 10 degrees; wherein the fortified rim has a thickness of at least 2 mils greater than the adjacent portion of the sidewall over a height of at least 2 mils, said tumbler defining a volume of at least about 16 fluid ounces. More typically, the sidewall extends upwardly with a taper of from about 2.75 to about 9 degrees and preferably with a taper of from about 5 to about 7 degrees. The fortified rim generally has thickness and a height of from about 1.5 to about 6 times the thickness of the adjacent portion of the sidewall, while a thickness and height of from about 3 to about 5 times the thickness of the adjacent portion of the sidewall is preferred. The tumbler is made from a polymeric material which is an optically clear polymer with a haze value of less than 10, selected from the group consisting of polystyrene, clarified polypropylene, polyesters, polycarbonates, polyacrylates and styrene acrylonitrile.

The volume of the injection molded tumbler is typically from about 1.5 to about 4 times the volume of an injection molded parison from which it was prepared and the tumbler defines a volume of from about 16-20 fluid ounces.

The present invention is directed in still yet another embodiment to a reusable, permanent ware polycarbonate container and method of making the polycarbonate container. The polycarbonate container mimics the clarity of glass without having the undesirable fragile property of glass and is more durable than other plastic containers such as polystyrene containers. Thus, the polycarbonate containers or tumblers have the look and feel of glass permaware and can be employed in normal usage without concern for breakage if the container is dropped. The container or tumbler includes a base, a sidewall and a fortified upper rim. The sidewall is integrally formed with the base and extends upwardly from the outer edge thereof. The sidewall is of uniform caliper or thickness of about greater than 50 thousandths of an inch ("mils") to about

500 thousandths of an inch. The tumbler preferably has a mouth (upper rim) which is about as wide or wider than the diameter of the remainder of the tumbler. Such containers are not as easily handled during the blow-molding process as blow-molded bottles and the like in which the mouth of the bottle is substantially less than the diameter of the shoulders and remaining portions of the bottle. At the upper extremity of the sidewall or mouth can be provided a fortified rim which serves to impart additional rigidity to the container. The fortified rim area has a finite width and height both of which exceed the thickness of the adjacent sidewall. While the tumbler is generally cylindrical in overall shape, the tumbler can be provided with either a uniform or non-uniform taper. The tumbler can be embossed to impart a decorative pattern on the sidewall. The permaware polycarbonate container of the present invention is preferably prepared by a side-by-side injection blow-molding method and apparatus as disclosed in U.S. 4,540,543. The patented method comprises: providing an injection mold including a mold cavity formed by a mold wall and a core; injecting molten polycarbonate into the cavity to form a parison on the core; separating said parison from the mold wall by moving the parison on the core axially in a straight path away from the mold wall; providing a blow mold adjacent the mold cavity in side-by-side relationship therewith; moving the parison on the core in a substantially arcuate path into axial alignment with the blow mold; moving the parison on the core axially in a straight path into the blow mold; and expanding the parison on the core in the blow mold at a uniform temperature to form the hollow container. The apparatus comprises: an injection mold including a mold wall; a core engageable with said injection mold to form a mold cavity with the mold wall; means to inject molten polycarbonate into the mold cavity to form a parison therein; a blow mold adjacent the mold cavity in side-by-side relationship therewith; means to separate the parison from the mold wall operative to move the parison axially in a straight path away from the mold wall, followed by in a substantially arcuate path into axial alignment with the blow mold, followed by axially in a straight path into the blow mold; and means to expand the parison on the core in the blow

mold to form the hollow container. The core is preferably separated from the hollow container leaving the container in the blow mold and returned to the injection mold for another cycle along paths corresponding to the foregoing path, i.e., axially, substantially arcuate and axially into the injection mold. An ejection station may then
 5 be provided adjacent the blow mold in side-by-side relationship. An ejection core can transfer the hollow container from blow mold to ejection station and return along paths corresponding to the paths of the core. In one embodiment, a second core, second ejection station, second blow mold and second ejection core are provided on the side opposed to the blow mold and ejection station for operation of an overlapping
 10 cycle. The second core and second ejection core move on paths corresponding to the paths of the core and ejection core. That is, when the core is in the blow mold the second core is in the injection mold. A major advantage of the patented blow-molding process resides in the rapid operating cycle enabled by the critical movement paths. Also, the process and apparatus are simple, convenient to operate and reliable.
 15 The resultant high productivity is a significant feature. In this aspect of the invention a method of forming a durable polycarbonate permaware container includes: (a) injecting molten polycarbonate into a mold cavity formed by a mold wall and a core to form a polycarbonate parison on the core; separating the parison from the mold wall by moving the parison on the core axially in a straight path away from the mold
 20 wall; moving the parison on the core in a substantially arcuate path into axial alignment with a blow mold which is in a side-by-side relationship with the mold cavity; moving the parison on the core axially in a straight path into the blow mold; and expanding the parison on the core in the blow mold at a uniform temperature to form a hollow container having a sidewall integrally formed to a base and a fortified
 25 rim, the sidewall having a uniform thickness of from about greater than 50 mils to about 500 mils. More typically, the sidewall has a uniform thickness of from about 75 mils to about 375 mils. In most instances, the polycarbonate is injected into the mold cavity at a temperature of from about 450°F to about 700°F and more typically,

at a temperature of from about 500°F to about 650°F. In general, the molten polycarbonate is injected into the mold cavity at a pressure of about 1,000 to 3,000 psi and in a preferred embodiment at an injection pressure of about 2,100 psi. The parison is expanded at a uniform temperature of from about 250°F to about 500°F, at
5 a pressure of from about 100 to about 500 psi. Typically, the polycarbonate comprises aromatic homopolycarbonate or aromatic copolycarbonate resins with a melt flow rate of from about 10 to 22 g/10 min. The polycarbonate tumbler is an injection blow-molded polycarbonate permaware hollow container comprising: a base forming the bottom of the container defining an outer edge thereof; a sidewall
10 integrally formed with the base extending upwardly from the outer edge thereof and having a thickness of from about over 50 to about 500 mils to a fortified rim about its upper extremity. The fortified rim has a thickness of at least 2 mils greater than an adjacent portion of the sidewall over a height of at least 2 mils. Both the width and height of the fortified rim are from about 1.1 to about 4 times a thickness of an
15 adjacent sidewall. In a particularly preferred article, both the width and the height of the fortified rim are about 100 mils and the adjacent sidewall is about 80 mils. The base is from about 1.1 to about 8 times the thickness of the sidewall. The permaware polycarbonate container is preferably one wherein the bottom of the base has integrally molded thereto indicia or a configuration different from the remaining base.
20 A particularly preferred method of forming a container having a wall thickness greater than 50 mils comprises: blowing a parison in a blow mold shaped in the form of said container; inserting within said blown container a core which presses the base of said container against a mold face having thereon indicia or other structural configurations so as to mold said indicia or other mold configurations onto the
25 outside surface of the base. Most preferably, the parison is formed from a polycarbonate plastic and the parison is blown by directing fluid pressure initially at the top of the parison and directing the fluid pressure from the top toward said base of said parison.

The present invention is directed in still yet another aspect to improvements in forming permaware containers by a continuous blow-molding process. The invention is also directed to improvements in the blow-molding process as disclosed in U.S. 4,540,543 so as to form containers from resins other than polystyrene.

5

The present invention is characterized in these latter aspects as a side-by-side injection blow-molding method and apparatus and is at least in part disclosed in U.S. 4,540,543. The patented method comprises: providing an injection mold including a mold cavity formed by a mold wall and a core; injecting molten resin into the cavity
 10 to form a parison on the core; separating said parison from the mold wall by moving the parison on the core axially in a straight path away from the mold wall; providing a blow mold adjacent the mold cavity in side-by-side relationship therewith; moving the parison on the core in a substantially arcuate path into axial alignment with the blow mold; moving the parison on the core axially in a straight path into the blow
 15 mold; and expanding the parison on the core in the blow mold at a uniform temperature to form the hollow container. The apparatus comprises: an injection mold including a mold wall; a core engageable with said injection mold to form a mold cavity with the mold wall; means to inject molten resin into the mold cavity to form a parison therein; a blow mold adjacent the mold cavity in side-by-side
 20 relationship therewith; means to separate the parison from the mold wall operative to move the parison on the core axially in a straight path away from the mold wall, followed by in a substantially arcuate path into axial alignment with the blow mold, followed by axially in a straight path into the blow mold; and means to expand the parison on the core in the blow mold to form the hollow container. The core is
 25 preferably separated from the hollow container leaving the container in the blow mold and returned to the injection mold for another cycle along paths corresponding to the foregoing path, i.e., axially, substantially arcuate and axially into the injection mold. An ejection station may then be provided adjacent the blow mold in side-by-side

09435411095

relationship. An ejection core can transfer the hollow container from blow mold to ejection station and return along paths corresponding to the paths of the core.

In an additional embodiment, a second core, second ejection station, second blow mold and second ejection core are provided on the side opposed to the blow mold and

5 ejection station for operation of an overlapping cycle. The second core and second ejection core move on paths corresponding to the paths of the core and ejection core. That is, when the core is in the blow mold the second core is in the injection mold. Obviously, additional cores, ejection stations, blow molds, and ejection cores can be provided and operated in an overlapping cycle to increase productivity. A major
10 advantage of the patented blow-molding process resides in the rapid operating cycle enabled by the critical movement paths. Also, the process and apparatus are simple, convenient to operate and reliable. The resultant high productivity is a significant feature.

15 In accordance with this invention, the above patented process is used to form injection blow-molded containers formed of polymers other than polystyrene. Thus, it has been found that the above patented process can be used to form clear containers from resins such as polycarbonate, polyethylene terephthalate, polycarbonate/ABS mixed resin, acrylic resins, clarified (amorphous) polypropylene and
20 polyvinylchloride. Additionally, the present invention is directed to a process of molding the base of a blown container without removing the container from the blow mold. In this invention, after the parison is blown to the container in the blow cavity, an ejection core is inserted into the container while the container remains in the blow cavity. The ejection core pushes the base of the container against a mold opposed to
25 the outside surface of the container base. The mechanical pressure of the ejection core against the container base is sufficient to adequately transfer the molded configuration of the mold onto the outside surface of the container base. Once the base is molded, the container can be removed from the blow cavity by the ejection core on a continuous basis. The continuous process saves considerable time and

energy over prior art processes which required a stamping step after the container had been removed from the blow cavity. There is thus provided a method of forming a container comprising: injecting molten resin into a mold cavity formed by a mold wall and a core to form a resinous parison on the core; separating the parison from the mold wall by moving the parison on the core axially in a straight path away from the mold wall; moving the parison on the core in a substantially arcuate path into axial alignment with a blow mold which is in a side-by-side relationship with the mold cavity; moving the parison on the core axially in a straight path into the blow mold; and expanding the parison on the core in the blow mold at a uniform temperature to form a hollow container; wherein the resin is selected from the group consisting of filled polystyrene, filled and non-filled polycarbonate, polyethylene terephthalate, polycarbonate and ABS mixtures, acrylic resins, clarified polypropylene and polyvinylchloride. The filled resins contain up to 5 wt.% of nanometer-sized particles which may comprise a clay. In one embodiment, a transparent drinking tumbler is comprised of polystyrene filled with nanometer-sized particles having a size within the range of visible-light wavelengths. In another aspect, there is provided a method of forming a container having a wall thickness greater than 50 mils, the container containing sidewalls and an integrally formed base, the method comprising: blowing a parison in a blow mold shaped in the form of the container to form a hollow container, inserting within the hollow container, which remains in the blow mold, a core which presses the base of the container against a mold face having thereon indicia or other structural configurations so as to mold the indicia or other mold configurations onto the outside surface of the base. Another method involves forming a container comprising: (a) injecting molten resin into a mold cavity formed by a mold wall and a core to form a resinous parison on the core; (b) separating the parison from the mold wall by moving the parison on the core axially in a straight path away from the mold wall; (c) moving the parison on the core in a substantially arcuate path into axial alignment with a blow mold which is in a side-by-side relationship with the mold cavity; (d) moving the parison on the core axially in a

straight path into the blow mold; and (e) expanding the parison on the core in the blow mold by directing fluid initially at the top of the parison and directing the fluid pressure from the top toward the base of the parison at a uniform temperature to form a hollow container; there the resin is selected from the group consisting of

5 polycarbonate, polyethylene terephthalate, polycarbonate and ABS mixtures, acrylic resins, clarified polypropylene and polyvinylchloride.

In still further embodiments of the present invention, there is provided an injection blow-molded tumbler with a fortified rim having a thickness greater than the

10 adjacent sidewall formed of a polymeric material including a styrene/butadiene copolymer. In general, the copolymer is from about 2 to about 40 percent by weight butadiene residue with from about 8 to about 15 percent by weight butadiene residue in the composition being typical. The tumbler may consist entirely of

15 butadiene/styrene copolymer, or the copolymer may be blended with other polymers, for example, polystyrene.

Alternatively, polystyrene or other polymeric composition may be provided with an impact modifier. Typically, impact modifiers may be core-shell polymers, olefin containing copolymers, rubber polymers, rubber copolymers, styrene

20 containing copolymers and mixtures thereof. So also, the inventive tumblers may be made from filled polymeric compositions including conventional filler such as mica, talc and the like. Suitable filled compositions may include from 5 to 50 weight percent filler, with from about 8 to about 20 percent filler being more typical. From about 10 to about 15 weight percent filler is perhaps most suitable for the injection

25 blow-molded tumblers.

Brief Description of Drawings

The invention is described in detail below with reference to numerous examples and drawings. In the drawings:

Figure 1(a) is a view in elevation of a tumbler produced in accordance with the present invention;

Figure 1(b) is a plan view of the bottom of the tumbler of **Figure 1(a)**;

5

Figure 1(c) is a partial view in elevation of the tumbler of **Figure 1(a)** showing the molded-in design of the tumbler of **Figure 1(a)** and illustrating the taper of the tumbler;

10

Figure 2(a) is a view in elevation of another tumbler constructed in accordance with the present invention;

Figure 2(b) is a plan view of the bottom of the tumbler of **Figure 2(a)**;

15

Figure 3(a) is a view in elevation of yet another tumbler constructed in accordance with the present invention;

Figure 3(b) is a plan view of the bottom of the tumbler of **Figure 3(a)**;

20

Figure 3(c) is a partial view in elevation of the tumbler of **Figure 3(a)** showing the molded-in design and illustrating the taper of the tumbler;

Figure 3(d) is a schematic view illustrating the angular relationships of the design of **Figures 3(a)-(c)**;

25

Figure 4(a) is a schematic view illustrating the “lip curl” of a conventional blow-molded plastic cup;

Figure 4(b) is a schematic view illustrating the solid-bead fortified rim of a tumbler produced in accordance with the present invention; and

Figure 5 is a schematic drawing illustrating the manufacture of a tumbler in
5 accordance with the present invention.

Figure 6(a) is a view in elevation of a tumbler constructed in accordance with the present invention;

Figure 6(b) is a plan view of the bottom of the tumbler of **Figure 6(a)**;
10

Figure 6(c) is a partial view in elevation of the tumbler of **Figure 6(a)** showing the grip design in greater detail;

Figure 7(a) is a view in elevation of an alternate embodiment of a tumbler constructed in accordance with the present invention with a fluted design;
15

Figure 7(b) is a plan view of the bottom of the tumbler of **Figure 7(a)** showing 1 fluted surface;
20

Figure 8 is a view in elevation of still yet another tumbler constructed in accordance with the present invention;

Figure 9 is an elevational view showing in more detail an apparatus preferably used in the present invention to form tumblers of the present invention, the apparatus being in the closed position with the core in the injection mold;
25

Figure 10 is a view similar to **Figure 9** with the apparatus in the open position with the core and parison in the midst of transfer to the blow mold;

Figure 11 is a view similar to **Figure 9** with the apparatus in the closed position with the core and parison in the blow mold and with the second core in the injection mold;

5 **Figure 12** is a partial, expanded elevational view showing additional details;

Figure 13 is a detailed view of the ejection core engaged with the hollow article in the blow mold;

10 **Figures 14 and 15** are partial views showing alternate core embodiments;

Figure 16 is a line chart showing core movement from injection mold to blow mold and return;

Figure 17(a) is an elevation of a polycarbonate cup made by injection blow-molding;

20 **Figure 17(b)** is the bottom or base of the polycarbonate cup of **Figure 17(a)**;

Figure 17(c) is the fortified rim of the polycarbonate cup of **Figure 17(a)**;

25 **Figure 18** is a cross sectional view of an alternative ejection core which also provides a means to mold the base of the container; and

Figure 19 is a cross sectional view of an alternative blow mold.

Detailed Description

The invention is described below in connection with various embodiments and aspects. Modifications to particular embodiments within the spirit and scope of the present invention, which is set forth in the appended claims, will be apparent to those
5 of skill in the art.

Disposable tumblers in accordance with the present invention more closely resemble conventional glassware and mimic its rigidity, performance and “look and feel” than do previously known blow-molded articles. Salient features include the
10 biaxial-induced toughness of the blow-molded article, as well as rigidity achieved by combining a relatively low taper with a fortified upper rim. Conventional blow-molded cups typically include a very prominent curled lip which is not consistent with glassware and tends to make the article unappealing for everyday use or for use with guests.

15 There is shown in **Figures 1(a)** through **1(c)** a tumbler **10** constructed in accordance with the present invention. In general, tumbler **10** has a base portion **12**, a sidewall portion **14** and an upper circular rim portion **16** which extends about the periphery **18** of an opening **20** of tumbler **10**. Base portion **12** of tumbler **10** is
20 integrally formed with the rest of the tumbler and includes a bottom **22** which has a meniscus portion **24** and a base sidewall **26**. Base sidewall **26** is typically thicker than sidewall **14**, and has substantially zero taper.

Tumbler **10** is optionally provided with a molded-in design **28** which is more
25 clearly seen by reference to **Figures 1(b)** and **1(c)**. Base sidewall **26** extends upwardly to define an outer edge **30** which attaches to sidewall **14**. Sidewall **14** extends upwardly to fortified rim **16**. Rim **16** is integrally formed with sidewall **14** and is a continuous generally circular or oval, solid polymer bead extending about

periphery 18 of opening 20. Rim 16 has a width 31 which is defined by the difference between an inner diameter 32 and an outer diameter 34 of rim 16 and a height 35 which is the distance over which width 31 extends. Width 31 is thicker than adjacent sidewall portion 38 which is typically of the same caliper as the reset of
 5 sidewall 14. In the example shown in **Figures 1(a) – 1(c)**, adjacent sidewall portion 38 has a thickness of 10 mils, height 35 is approximately 28 mils and width 31 is approximately 40 mils at its thickest point.

Other dimensions of tumbler 10 are indicated on **Figure 1(a)**. Base portion 12
 10 has a diameter **D**, at edge 30 of about 2.125 inches, an outer upper diameter 34 of 2.770 inches an inner upper diameter 32 of 2.730 inches. The overall height, **H**, of tumbler 10 is 5.785 inches. These dimensions define an angle of taper **T** as shown about imaginary central axis 40 of about 3° for sidewall 14 of tumbler 10. As used
 15 herein “taper”, “degree of taper” and like terminology indicates the angle that the sidewall of the inventive tumbler makes with the imaginary central longitudinal axis defined by the sidewall which is substantially perpendicular to bottom 22, the taper of the article may also be thought of as the angle the sidewall makes with the bottom less 90 degrees.

20 **Figure 1(c)** shows a molded in swirl design 28 which extends from base portion 12 to roughly 50 per cent of the height of tumbler 10. Design 28 is comprised of wall embossments at least as prominent as $\frac{1}{2}$ the caliper of sidewall 14 and typically of the same thickness or prominence of the sidewall. Thus, design 28 substantially alters the topography of sidewall 14 and provides a secure grip for a
 25 user, as well as a modicum of longitudinal reinforcement.

There is shown in **Figures 2(a) and 2(b)** another tumbler 210 constructed in accordance with the present invention. In general, tumbler 210 has a base portion

212, a sidewall portion 214 and an upper circular fortified rim portion 216 which extends about the periphery 218 of an opening 220 of tumbler 210. Base portion 212 of tumbler 210 is integrally formed with the rest of the tumbler and includes a bottom 222 which has a meniscus portion 224 and a base sidewall 226. Base sidewall 226 is typically thicker than sidewall 214, and has slightly reversed taper as opposed to the taper of sidewall 214.

Tumbler 210 is provided with a molded-in design 228 which is a series of concentric rings as shown on **Figures 2(a) and 2(b)**. The dimensions of tumbler 210 are otherwise substantially identical to the dimensions of the tumbler 10 of **Figures 1(a) – 1(c)**.

There is shown in **Figures 3(a) through 3(d)** a tumbler 310 constructed in accordance with the present invention. In general, tumbler 310 has a base portion 312, a sidewall portion 314 and an upper circular fortified rim portion 316 which extends about the periphery 318 of an opening 320 of tumbler 310. Base portion 312 of tumbler 310 is integrally formed with the rest of the tumbler and includes a bottom 322 which has a meniscus portion 324 and a base sidewall 326. Base sidewall 326 is thicker than sidewall 314 and has a slight taper.

Tumbler 310 is optionally provided with a “cut-glass” molded-in design 328 which is most clearly seen by reference to **Figures 3(b) and 3(c)**. The molded in design defines a series of triangular ridges which are deeper in dimension than the wall caliper of sidewall 314, thus providing strength by way of corrugation. The molded in cut glass grooves 328 have a wall thickness the same as the rest of the tumbler and a depth of up to about 1/8 inch as shown.

Base sidewall 326 extends upwardly to define an outer edge 330 which attaches to sidewall 314. Sidewall 314 extends upwardly to fortified rim 316.

Rim **316** is integrally formed with sidewall **314** and is a continuous generally circular or oval, solid polymer bead extending about periphery **318** of opening **320**. Rim **316** has a width **331** which is defined by the difference between an inner diameter **332** and an outer diameter **334** of rim **316** and a height **335** which is the longitudinal distance over which width **331** extends. Width **331** is thicker than adjacent sidewall portion **338** which is typically of the same caliper as the rest of sidewall **314**. In the example shown, adjacent sidewall portion **338** has a thickness of 20 mils height **335** is approximately 28 mils and width **331** is approximately 40 mils at its thickest point. Other dimensions of tumbler **310** are approximately identical to those of tumblers **210** of **Figures 2(a) and 2(b)** and tumbler **10** of **Figures 1(a) – 1(c)**. Tumbler **310** thus has a taper of 3° .

Tumbler **310** is particularly rigid due to the triangular ridge “cut glass” pattern **328** which extends upwardly from the base over about 40% of the height of the glass, forming a grip for the user, as can best be appreciated from **Figure 3(b)**. As can be seen from **Figure 3(b)**, the ridges are accordion shape when viewed in section, wherein segments have flat surfaces **344** having a width of one quarter of an inch or so. As shown in **Figures 3(c) and 3(d)**, there is an angle, **S**, between connected segments of 130 degrees and each triangular segment extends over an angle **S1** of about 15 degrees of the periphery of the tumbler.

Referring to **Figure 4(a)**, there is schematically depicted a lip curl characteristic of prior art disposable drinking cups. In general, such prior art cups have a sidewall **414a** of a given thickness **D_{4a}** which extends upwardly into a curl generally indicated at **450_a**. The curl has a characteristic radius **R_a** as well as a height **H_a** and a width **W_a**. Such structures are sometimes called “open top curls” and may be seen, for example, in United States Patent No. 4,540,543. See **Figure 4** thereof at **31**.

Figure 4(b) schematically depicts in section and elevation a solid polymer bead about the upper periphery of a tumbler, that is, an embodiment of the fortified rim of the present invention which extends around the upper periphery of the inventive tumbler. The tumbler has a sidewall **414b** of thickness D_{4b} . The fortified rim, **416b** is formed of solid polymer integrally formed with sidewall **414b** and has a height H_b and width W_b as indicated. Inasmuch as the cross section of the embodiment shown in circular, the width W_a is approximately equal to the height W_b .

Bead **416b** has advantages over the prior art top curl, whether or not one is seeking to mimic glassware. For one, it rounded and will not tend to snag on the mold or snag with a cup cover as to prior art top-curls. For another advantage, a bead type top rim can more compactly provide rigidity to a cup than does a top curl, with less width. While polymer bead **416b** is shown as circular in cross section, other profiles may be suitable for example, conic sections such as ellipsoid shapes of truncated conic sections or profiles such as truncated conic section including a semi-circle or a half ellipse.

As noted above, tumblers in accordance with the present invention are produced by injection blow-molding. Optically opaque materials may be used, however, optically transparent polymers are usually preferred. Particularly preferred polymers include crystal polystyrene available from Dow Corporation, Midland, Michigan, grade 685d. this polymer may be used to produce the inventive tumblers by the method of United States Patent No.4,540,543, the disclosure of which is incorporated herein by reference. The subject apparatus and method is generally shown and described in connection with **Figure 5**.

There is illustrated in **Figure 5** an injection mold **555**, a blow mold **557** and an ejection station **559**. Together with core **561**, mold **555** defines an injection mold

cavity wherein a parison **563** is injection molded. Core **561**, mold **555** are provided with passageways **565** to apply fluid pressure to aid processing of the tumbler noted in the '543 patent. After injection molding, parison **563** is retained on core **40** and moved to blow mold **557**. Parison **563** is of predetermined volume and has at its upper periphery a fortified rim **516** in accordance with the invention. The parison is expanded to the desired shape in blow mold **557** to a volume of from about 1.5 to about 4 times its former volume on core **561**. This process imparts biaxial orientation to the article, reducing the anisotropy inherent in the injection molding process and proving biaxial toughness to the article.

There is shown in **Figures 6(a)** through **6(c)** a tumbler **610** constructed in accordance with the present invention. In general, tumbler **610** has a base portion **612**, a sidewall portion **614** and an upper circular rim portion **16** which extends about the periphery **618** of an opening **620** of tumbler **610**. Base portion **612** of tumbler **610** is integrally formed with the rest of the tumbler and includes a bottom **622** which has a meniscus portion **624** and a base sidewall **626**. Base sidewall **626** is typically thicker than sidewall **614**, and has either no taper, or a reverse taper from the taper of sidewall **614**.

Tumbler **610** is optionally provided with a molded-in design **628** which is more clearly seen by reference to **Figures 6(b)** and **6(c)**. Molded in designs may define ridges which are deeper in dimension than the wall caliper of sidewall **614**, thus providing strength by way of corrugation, much like as is known in connection with cardboard. The design shown is an alternating saw-tooth type, slightly curved, with larger curves alternating with smaller curves about the entire periphery of the tumbler. The design is also operative as a grip for a user since the smooth sidewall is substantially altered.

Base sidewall **626** extends upwardly to define an outer edge **630** which attached to sidewall **614**. Sidewall **614** extends upwardly to fortified rim **616**. Rim **616** is integrally formed with sidewall **614** and is a continuous generally circular or oval, solid polymer bead extending about periphery **618** of opening **620**. Rim **616** has a width **631** which is defined by the difference between an inner diameter **632** and an outer diameter **634** of rim **616** and a height **635** which is the distance over which width **631** extends. Width **631** is thicker than adjacent sidewall portion **638** which is typically of the same caliper as the rest of sidewall **614**, that is, sidewall **614** is substantially uniform in thickness on the entire tumbler. In the example shown, adjacent sidewall portion **638** has a thickness of 20 mils, height **635** is approximately 28 mils and width **631** of rim **616** is approximately 40 mils at its thickest point.

The other dimensions of tumbler **610** are indicated on **Figures 6(a)** through **6(c)**. Base portion **612** has a diameter, **d1**, at edge **630** of about 2.125 inches, an outer upper diameter **34** of 3.32 inches and an inner upper diameter **632** of 3.279 inches. The overall height, **H** of tumbler **10** is 4.75 inches. These dimensions, as can be seen from **Figure 6(c)**, define an angle of taper **T** as shown about imaginary central axis **40** of about 7° for sidewall **614** of tumbler **610**. As used herein, “taper”, “degree of taper”, or like terminology indicates the angle that the sidewall of the inventive tumbler makes with the imaginary central longitudinal axis defined by the sidewall which is substantially cylindrical or conical depending upon the embodiment. Inasmuch as the sidewall is substantially perpendicular to bottom **622**, the taper may also be thought of as of the angle the sidewall makes with the bottom less 90 degrees.

Figure 6(c) shows a molded in “sawtooth” swirl design **628** which extends from base portion **612** to roughly 65 per cent of the height of tumbler **610**. Design **628** is comprised of wall embossments at least as prominent as ½ the caliper of sidewall **614**. Typically the molded in ridges of the design are about as deep as the

wall caliper. Thus, design **628** substantially alters the topography of sidewall **614** and provides a secure grip for a user.

There is shown in **Figures 7(a)** through **7(c)** another tumbler **710**
 5 constructed in accordance with the present invention. Tumbler **710** has a base portion **712**, a sidewall portion **714** and an upper circular rim portion **716** which extends about the periphery **718** of an opening **720** of tumbler **710**. Base portion **712** of tumbler **710** is integrally formed with the rest of the tumbler and includes a bottom **722** which has a meniscus portion **724** and a base sidewall **726**. Base sidewall **726** is
 10 typically thicker than sidewall **714**, and has a reverse taper from the taper of sidewall **714**, as can be seen from **Figure 7(a)**.

Tumbler **710** is optionally provided with a fluted molded-in design **728** which is seen by reference to **Figure 7(b)**. Each flute **719** is substantially a flat,
 15 rectangular shape and approximately 30 degrees about the periphery 242 of the glass. Molded-in design **728** provides strength as is known in connection with injection molded drinking vessels. Base sidewall **726** extends upwardly to define an outer edge **730** which attaches to sidewall **714**. Sidewall **714** extends upwardly to fortified rim **716**.

20 Rim **716** is integrally formed with sidewall **714** and is a continuous generally circular or oval, solid polymer bead extending about periphery **718** of opening **720**. Rim **716** has a width **731** which is defined by the difference between an inner diameter **732** and an outer diameter **734** of rim **716** and a height **735** which is
 25 the distance over which width **731** extends. Width **731** is thicker than adjacent sidewall portion **738** which is typically of the same caliper as the rest of sidewall **714**. In the example shown, adjacent sidewall portion **738** has a thickness of 20 mils, height **736** is approximately 28 mils and width **731** is approximately 40 mils at its thickest point.

Other dimensions of tumbler **710** are generally as indicated in connection with tumbler **610** of **Figure 6**. Sidewall **714** of tumbler **710** has a taper of approximately 6.5 degrees.

5 The tumblers of **Figures 6** and **7** have the fortified rim design of the present invention wherein the rim includes a spherical or elliptical solid polymer bead. Typically, this bead is twice the thickness of the adjacent sidewall or more as was discussed in connection with **Figures 4(a)** and **4(b)** above. That discussion applies equally to the embodiments of **Figures 6, 7, 8** and **17** as will be appreciated from the
10 foregoing and subsequent discussion.

Salient features of the inventive tumblers include the biaxial-induced toughness of the blow-molded article, as well as rigidity achieved by combining a relatively low taper with a fortified upper rim. Conventional blow-molded cups
15 typically include a very prominent curled lip which is not consistent with glassware and tends to make the article unappealing for everyday use or for use with guests. Moreover, the rim is larger than a comparable rim on tumblers of the invention such that there is more rim stress upon flexing, especially in connection with larger volume tumblers as will be appreciated from the following.

20 There is shown in **Figure 8** a tumbler **810** which is constructed in accordance with the present invention. In general, tumbler **810** is cylindrical or in the shape of a truncated cone and has a base portion **812**, a sidewall portion **814** and an upper circular rim portion **816** which extends about the periphery **818** of an opening **820** of
25 tumbler **810**. Base portion **812** of tumbler **810** is integrally formed with the rest of the tumbler and includes a bottom **822** which has a meniscus portion **824** and a base sidewall **826**. Base sidewall **826** is typically thicker than sidewall **814**, and has either no taper, or reverse taper from the taper of sidewall **814**.

Base sidewall **826** extends upwardly to define an outer edge **830** which attaches to sidewall **814**. Sidewall **814** extends upwardly to fortified rim **816**. Rim **816** is integrally formed with sidewall **814** and is a continuous generally circular or oval, solid polymer bead extending about periphery **818** of opening **820**. Rim **816** has a width **831** which is defined by the difference between an inner diameter **832** and an outer diameter **834** of rim **816** and a height **835** which is the distance over which width **831** extends. Width **831** is thicker than adjacent sidewall portion **838** which is typically of the same caliper as the rest of sidewall **814**, that is, sidewall **814** is substantially uniform in thickness on the entire tumbler. In the example shown, adjacent sidewall portion **838** has a thickness of 20 mils, height **835** is approximately 28 mils and width **831** of rim **816** is approximately 28 mils and width **831** of rim **816** is approximately 40 mils at its thickest point. The tumbler is also provided with a series of molded-in grooves **841** which extend around the tumbler. These grooves provide a grip for a user as well as providing rigidity to the article. Typically, the circumferential grooves **841** have a depth of from **810** to 40 mils.

Other dimensions of tumbler **810** are indicated on **Figure 8** and Table I in connection with the tumbler of **Figure 8(b)** as shown schematically in **Figure 4(b)**. Base portion **812** has a diameter **d1**, at edge **830** of about 2.5 inches, an outer upper diameter **834** of 3.38 inches and an inner upper diameter **832** of 3.32 inches. The overall height, **H** of tumbler **810** is about 4.6 inches. These dimensions define an angle of taper **T** as shown about imaginary axis **840** of about 5° for sidewall **814** of tumbler **810**. As used herein, “taper”, “degree of taper” or like terminology indicates the angle that the sidewall of the inventive tumbler makes with the longitudinal axis defined by the sidewall which is substantially cylindrical or conical depending upon the embodiment. Inasmuch as the sidewall is substantially perpendicular to bottom **822**, the taper may also be thought of as of the angle the sidewall makes with the

bottom less 90 degrees, because the axis of the tumbler is substantially perpendicular to bottom **822** as shown.

Referring again to **Figure 4(a)**, there is schematically depicted a lip curl
 5 characteristic of prior art disposable drinking cups. In general, such prior art cups have a sidewall **414a** with a portion **438a** adjacent the curl of a given thickness **D_{2a}** which extends upwardly into a curl generally indicated at **450_a**. The curl has a characteristic radius **R_a** as well as a height **H_a** and a width **W_a**. Such structures are sometimes called “open top curls” and may be seen, for example, in United States
 10 Patent No. 4,540,543. See **Figure 4** thereof at **31**. **Figure 4(b)** schematically depicts in section and elevation a solid polymer bead **416** about the upper periphery of a tumbler, that is, an embodiment of the fortified rim of the present invention as is also shown in **Figure 8** hereof which extends around the upper periphery of the inventive tumbler. The tumbler has a sidewall **414b** with a portion adjacent rim **416b** of
 15 thickness **D_{2b}**. the fortified rim, **416b** is formed of solid polymer integrally formed with sidewall **414b** and has a height **H_b** and width **W_b** as indicated. Inasmuch as the cross section of the embodiment shown is circular, the width **W_a** is approximately equal to the height **H_b**. Bead **416b** has advantages over the prior art top curl. For one, it is rounded and will not tend to snag on the mold or snag with a cup cover as do
 20 prior art top-curls. For another advantage, a bead type top rim can more compactly provide rigidity to a cup than does a top curl, with less width as demonstrated below in Table I, even for a relatively large volume container such as that shown in **Figure 8**.

TABLE 1. Impact of Dimensions Upon Rigidity

Container	Cup of Figure 4(a)	Tumbler of Figure 4(b) and Figure 8
	Open Rim	Solid Rim
Sidewall Caliper, Inches	0.0150	0.0150
Top Curl Caliper, Inches	0.0150	0.0628
Top Curl/Sidewall Caliper Ratio	1.00	4.19
Top Curl Width, Inches	0.084	0.063
Taper, Degrees	5.0	5.0
Inside height, Inches	4.584	4.584
Upper Inside diameter, Inches	3.3250	3.3250
Lower Inside diameter, Inches	2.5200	2.5200
Volume, Ounces	17.1448	17.1448
Rigidity, LBS/0.25" Deflection	1.045	1.045

- 5 Being more compact, less hoop stress about the rim is generated upon flexing of the cup. While polymer bead **416b** is shown as circular in cross-section, other profiles may be suitable for example, conic sections such as ellipsoid shapes or truncated conic sections or profiles such as truncated conic section including a semi-circle or a half ellipse. As noted above, tumblers in accordance with the present
- 10 invention are produced by injection blow-molding optically transparent polymers. Particularly preferred polymers include crystal polystyrene available from Dow Corporation, Midland, Michigan, with the grade designation 685D. This polymer may be used to produce the inventive tumblers by the method of United States Patent No. 4,540,543, the disclosure of which is incorporated herein by reference. The

subject apparatus and method is shown and described in more detail in connection with the embodiments of the present invention which follow.

The present invention is directed in still yet further embodiments to a reusable polycarbonate container or tumbler and method of making the polycarbonate container. The reusable or permaware polycarbonate container of the present invention is made by an injection blow-molding process to provide a polycarbonate container which mimics the aesthetic clarity of glass and polystyrene containers but is more durable than either glass or polystyrene containers of comparable caliper and shape. The permaware polycarbonate containers or tumblers include a base, a sidewall and a fortified upper rim. The sidewall is integrally formed with the base and extends upwardly from the outer edge thereof. The sidewall is of uniform caliper or thickness of greater than about 50 thousandths of an inch ("mils") to about 500 thousandths of an inch. Preferably, the caliper of the sidewall ranges from about 75 mils to about 375 mils. While the tumbler in accordance with the invention is generally cylindrical in overall shape, the sidewall preferably has either a uniform or non-uniform taper from an imaginary central axis from the base to the opening. The height of the tumbler is from about 5 to 10 inches. At the upper extremity of the sidewall is a fortified rim which serves to impart rigidity to the tumbler. The fortified rim area has a finite width and height both of which exceed the thickness of the adjacent sidewall. The rim is at least 2 mils thicker than the adjacent sidewall over a height of at least 2 mils; preferably, both the width and the height of the rim are from about 1.1 to about 4 times the thickness of the adjacent sidewall. The base ranges from about 1.1 to about 8 times, preferably, from about 1.1 to about 4 times the thickness of the sidewall. Generally speaking, the tumbler in accordance with the invention, has a volume of at least 1.5 and up to 4 times the volume of the injection molded parison from which it was prepared; while volume ratios (sometimes referred to as "blow ratio") of from about 1.75 to about 3 are typical. A blow ratio of about 2 to about 2.5 is most preferable. Articles in accordance with the present invention are

distinguished from other containers, such as bowls or other flat shapes where rigidity is not critical, by virtue of the fact that the ratio of the height of the tumbler to the diameter of the upper opening is generally in the range of from about 1 to about 5. Ratios of 1.25 to about 4 are preferred, while ratios of about 1.5 to about 3.5 are more preferred.

An example of a polycarbonate container in accordance with the present invention is a "bell fountain" container illustrated in **Figures 17(a) - (c)** and is described in detail below. The reusable polycarbonate containers are preferably prepared by the rapidly and economically efficient side-by-side injection blow-molding process as disclosed in aforementioned U.S. 4,540,543. The process is described below in combination with the drawings of **Figures 9-19**. U.S. 4,540,543 is herein incorporated by reference in its entirety. Referring to **Figures 9-11**, injection station **910** is secured in fixed platen **911**. Blow stations **912** and **913** are also secured to fixed platen **911** and are situated adjacent injection station **910** and in side-by-side relationship with respect thereto, with blow station **912** containing blow mold **916** which may be split if desired being on one side of the injection station and blow station **913** containing blow mold **917** which may be split if desired being on the other side. Blow molds **916** and **917** are in the shape of the hollow articles to be made. Ejection stations **914** and **915** are also secured to fixed platen **911** and are situated adjacent the respective blow stations in side-by-side relationship with respect thereto, with ejection station **914** situated adjacent blow station **913** and ejection station **915** situated adjacent blow station **912**. Core **920** is provided secured to movable platen **921** engageable with injection station **910** as shown in **Figure 9**. The injection station **910** includes mold wall **922**. Thus, when core **920** is engaged with injection station **910** as shown in **Figure 9** the core **920** is spaced from the mold wall **922** to form mold cavity **923** therebetween. Injection means **924** is in communication with mold cavity **923** and is connected to a source of hot flowable plastic, i.e., polycarbonate, (not shown) for forcing said hot formable plastic under pressure into

mold cavity **923** to form parison **925**. Core **920** is movable into and out of
 engagement with injection station **910** by movable platen **921** actuated by the motive
 means shown schematically in **Figure 9** and to be described in more detail herein
 below. Naturally, the movement of platen **921** may be accomplished by conventional
 5 means, shown only schematically in **Figure 9**, which are capable of providing a
 clamping force between the two platens to keep them from separating during the
 injection step and the other steps which will be described below. It should be
 understood that while movement of platen **921** is described, one may of course move
 platen **911** or both platens **911** and **921**, if desired. The hot, newly formed parison or
 10 container **925** remains in mold cavity **923** until sufficiently cooled to be removed, if
 desired using cooling means **926** adjacent mold wall **922**, as for example, by fluid
 circulation. If desired, such cooling means may also be provided in core **920**. After
 such cooling of parison **925**, the clamping force is released and platen **921** is moved
 away from platen **911** carrying with it core **920** and parison **925** adhered thereto. If a
 15 neck mold is used as to form a threaded neck portion the neck mold is operable by
 conventional means and remains closed during the formation of the parison, removal
 of the parison from the injection station and blowing, which also aids in retention of
 the parison on the core. In the present embodiment, a neck mold is not employed and
 both the parison and final article have a cup-shaped configuration as seen in the
 20 drawings and clearly shown in **Figure 13** and **Figure 17**. In such configuration, the
 top or mouth of the container (mold) is about as wide or wider than the diameter of
 the remainder of the container mold. Thus, parison **925** has a base portion **930**, a
 fortified rim or lip **931** and outwardly flaring side walls **932** extending from base **930**
 to lip **931**. Fortified rim **931** may serve as an undercut to aid in retention of the
 25 parison on the core. Core **920** is provided with fluid passageway **933** connected to a
 source of fluid pressure for blowing the final article. If desired, a vacuum may be
 drawn through passageway **933** to aid in retention of the parison on the core. Core
920 with parison **925** thereon is then moved to blow station **913** as shown in **Figures**
10 and **11** in a manner which first separates the parison from the mold wall **922** by

moving parison core **920** axially in a straight path away from said mold wall at least until the parison clears the injection station, followed by movement in a substantially arcuate path into axial alignment with blow station **913** and blow mold **917**, followed by moving the parison core axially in a straight path into blow mold **917**. Parison **925** is then expanded on core **920** in blow mold **917** by fluid pressure through passageway **933** to form hollow article **934**. **Figure 9** shows core **920** engaged with the injection station. **Figure 10** shows core **920** with parison **925** thereon removed from the injection station on its arcuate path between injection station **910** and blow station **913** with platen **921** and core **920** at the peak of their arcuate path. **Figure 10** shows core **920** engaged with blow station **913** forming hollow article **935** therein. After the formation of hollow article **934**, core **920** is removed from blow station **913** leaving hollow article **934** remaining therein and returned to the injection station along paths corresponding to the path taken by core **920** from the injection station **910** to the blow mold **917**, that is, the core is moved axially in a straight path away from blow mold **917** followed by movement in a substantially arcuate path into axial alignment with said injection station, followed by movement axially in a straight path into said injection station for repeat of the cycle.

Second core **940** having fluid passageway **945** similar to passageway **933** is provided on movable platen **921** adjacent core **920** in side-by-side relationship with respect thereto. Second core **940** is engageable with injection station **910** when core **920** engages blow mold **917** to form a second parison in an overlapping cycle with respect to core **920**. Thus, second core **940** engages injection station **910** to form a parison **925** in a manner similar to the formation of a parison on core **920** in the injection station **910**. The formation of a parison on core **940** takes place while core **920** is in the blow mold **917** forming the hollow article. Core **940** carrying a parison **925** is then removed from the injection station and transferred to blow station **912** and blow mold **916** in a path corresponding to the transfer path of core **910** to blow station **913** and blow mold **917** for formation of additional hollow article **934** in blow mold

917. The transfer of core 940 to blow mold 917 takes place simultaneously with the return of core 920 to injection station 910. After removal of core 920 from blow station 913 hollow article 934 remains in blow mold 917. Hollow article 934 corresponds in shape generally to parison 925 with an expanded configuration caused by the blowing step. Thus, article 934 has a base portion 941, fortified rims or lips 942 and outwardly flaring side walls 943 extending from base 941 to lips 942. The blown article 934 cools in contact with the walls of the blow mold which may contain cooling means 944, as for example for cooling by fluid circulation in a conventional manner. Article 934 may be retained in the blow mold by any desired means as by applying a vacuum to the inside of the blow mold or providing means on the blow mold to engage lip 942.

Ejection core 950 and second ejection core 951 are provided on movable platen 921 adjacent and in side-by-side relationship to cores 940 and 920, with ejection core 951 alongside second core 940. Thus, when cores 920 and 940 leave their respective blow molds 917 and 916 with the hollow articles remaining therein for return to the injection station, ejection cores 950 and 951 move into engagement with said hollow articles in the blow molds along paths corresponding to the paths of cores 920 and 940. Cores 950 and 951 then disengage from the blow molds removing hollow articles 934 with them and move from the blow stations to the ejection stations along paths corresponding to the paths of cores 920 and 940. Removal of hollow article 934 onto the ejection cores may be assisted by pusher means 952 operatively associated with blow molds 916 and 917 for positively pushing article 934 away from the blow molds, *see Figures 12 and 13*. Also, ejection cores 950 and 951 may be provided with fluid passageways 953 connected to a source of fluid pressure (not shown), *see Figure 13*, which may be used to draw a vacuum and aid in removal of hollow article 934 from the respective blow molds. The final hollow article is then transferred to the respective ejection station, which may incorporate any suitable ejection means as the chute, suction tube or other conventional means to

convey plastic articles. Removal of article **934** from the ejection cores **950** and **951** at ejection stations **914** and **915** may be assisted by flow pressure from passageway **953** and also by stripper **954** including stem **955** to which a widened cap **956** is attached (**Figures 12 and 13**) movable axially via motive means (not shown). After removal of the hollow article **934** at the ejection stations the cycle is repeated. The apparatus, particularly for use with cup-shaped articles, assures holding of the articles concentrically on the mandrels and effecting reliable transfer as shown in **Figure 13**.

In operation, the parison is transferred into blow mold **917** as above described and blown into final shape therein, followed by insertion of mandrel **950** which is shorter than the depth of the blow mold. In order to remove the blown article **934**, pusher plate **952** is advanced forcing the blown object onto mandrel **950** which is then withdrawn. If desired, vacuum may be applied through passage **953** better to assure adherence of article **934** to the mandrel during withdrawal from the blow mold. Clearly, pusher plate **952** and the stripper cap **956** may also be used to shape the portion of article **934** between them. If a rim undercut is embedded in the blow mold, it is overcome to effect release from the blow mold by the action of pusher plate **952** which has a stroke at least sufficient for the length of said undercut, it being understood that a given article may exhibit more than one undercut. In this manner, sticking of the finished article to the blow mold is avoided. Subsequently, mandrel **950** carrying article **934** is aligned with removal devices as described above and, since all relative movement between the mandrel and the blow mold may be precluded due to the close fit of the mandrel and the article at the neck of the article, which may be an interference fit or an undercut, and, if necessary due to the vacuum, the alignment will be consistent from cycle to cycle. Upon alignment with the ejection station, the vacuum if theretofore applied through channel **953** is released and stripper **954** is actuated to urge the article into engagement with the ejecting device by positive mechanical means. The advantage of this arrangement compared to previous practice is in its reliability, preventing interruptions of the operation and

thereby improving efficiency. While the foregoing description shows a single injection mold and core set, it will naturally be understood that multiple injection mold and core sets may readily be employed, for example, arranged side-by-side or in several rows. Thus, it can be seen that the process and apparatus of U.S. 4,540,543
 5 obtains significant advantages. The overlapping cycles enable plural operations to be conducted simultaneously. While core **90** is engaging injection station **910** to form a first parison, second core **940** is engaging blow mold **916** to form a final article **934**, second ejection core **951** is ejecting a hollow article at ejection station **915** and ejection core **950** is engaging a hollow article at blow station **913** for removal thereof,
 10 with the axial, arcuate and axial movement described hereinabove providing a considerable advantage in reduction in cycle time which of course is a prime consideration in this art. The so-called "dry cycle" is that part of the total operating cycle of the apparatus described in **Figures 9-11** which is not attributable to process related factors but only to the mechanism.

15 The total cycle divides into the dry cycle and the process cycle. In an injection blow-molding operation the pressure molding of the parison typically takes longer than the finishing thereof by blowing or the removal of the blown article. These three steps overlap so that while one parison is being molded another is being
 20 blown and still another is being removed after having been blown. Accordingly, the longest of these three steps determines the overall process cycle. Considering the injection molding step by itself it is found that the process of pressure molding and cooling the parison sufficiently to be removable from the injection mold takes about one (1) second for a polycarbonate cup referred to above, while the dry cycle of the
 25 injection mold clamping apparatus is apt to take nearly four (4) seconds in a conventional device. The dry cycle as such, being the greatest part of the total cycle, could not therefore be reduced because of the time consuming movement of the core assembly away from the injection mold, sideways into alignment with the blow mold

and towards the blow mold, including the reverse of same. This is true of prior linear and rotary systems.

In accordance with the present invention, however, the axial, arcuate and axial
 5 movement substantially reduces the dry cycle time and thus reduces the overall cycle time. Referring to **Figure 11**, the movements of movable platen **921** are shown diagrammatically, which will of necessity include the movement of the cores thereon. Thus, when platen **921** moves from the position in **Figure 9** to the position in **Figure 11** a given point on the platen will follow curve A. The return movement will follow
 10 curve **B**. As platen **921** moves away from platen **911** the section on curve A from location **960** to **961** represents movement from the closed position of **Figure 9** to that point at which movement of core **920** with parison **925** thereon may occur laterally without mechanical interference. As soon as location **961** is passed said point starts its lateral movement which is subdivided into three (3) sections, namely between
 15 locations **961** and **962** in which acceleration is taking place, then between **962** and **963** in which the velocity of the point is constant, followed by between **963** and **964** in which deceleration is taking place. Finally, locations **964** and **965** show the approach to the blow mold and the position shown in **Figure 11**. Naturally, the actual shapes of the curve segments will depend on the mass being moved, with the segment
 20 being steeper the lighter the movement assembly. As indicated above, curve **B** depicts the reverse movement. These movements can be effected by any conventional means, e.g. fluid actuators or by cam action. If by fluid actuators, it is readily possible to initiate their movement and thus also that of platen **921** by a limit switch placed to be tripped by platen **921** as soon as said platen reaches the distance
 25 from platen **911** at which the lateral movement of core **920** can take place unimpeded. If by cam action, fixed cams in the shape of curves **A** and **B** of **Figure 16** may be used and platen **911** may be equipped with corresponding cam followers, to the effect that the axial movement of platen **921** will at the same time induce its lateral movement according to the cam path. Other means to produce the same result may

be employed so long as the lateral movement of platen **921** is effectively controlled by its axial movement, whereby said lateral movement accommodates acceleration and deceleration of platen **921** according to the mass to be moved therewith. The advantage of this improved arrangement is evident from the gain in cycle time. Thus, in the case referred to hereinabove the dry cycle of the injection clamping apparatus is reduced from approximately 4 seconds to approximately 1.2 seconds, of which the lateral shifting of platen **921** takes only 0.4 to 0.5 seconds including acceleration and deceleration. This improvement is particularly noticeable in connection with mechanical, e.g. toggle or crank clamping mechanisms which are favored for rapid acting injection clamps over fluid actuated clamps. In the former, the clamping apparatus, which is of the "fixed stroke" type can be used to induce the movement of platen **21** during that portion of its opening and closing stroke respectively which is in excess of the minimum clearance between core **920** and mold **917**. Cores **920** and **940** are equipped with fluid passageways terminating in so-called blow slots **970** as shown in **Figure 14** in order to effect blowing of the preforms in the blow molds, as is known in the art. If permanently open, the blow slot **970** is connected according to conventional design of a source of pressure fluid and a source of vacuum via fluid passageway **978** whereby the change from one to the other is effected by a conventional valve in order for the dual function of the blow slot to be readily accomplished as needed during injection and opening of the injection mold, and then during blowing. The blow slot may be formed of two elements of the core, for example leading element **971** and following element **972**, that are capable of relative movement as shown in **Figure 14** by the arrow, with **Figure 11** showing leading element being relatively moveable, with element **971** having a leading bulb-like portion **973** connected to a movable stem **974** which in turn is connected to a motive means (not shown). It is necessary to control the opening and closing of blow slot **970** mechanically in the following sequence: the blow slot is closed and held in that condition while injection of the plastic into the mold is initiated and almost immediately thereafter is opened; alternatively, it may be kept closed until the filling

of the mold is accomplished and opened only thereafter. Vacuum is applied while the blow slot is open and maintained as core 20 or 40 is moved away from injection station 910 (see **Figures 9 and 10**). The blow slot remains open and vacuum is maintained while the preform moves from the injection station into the blow station, at which time, by suitable valving, the vacuum is broken and fluid pressure applied inside the preform to expand it into the shape of the finished article. At the end of the blowing cycle, the connection between the blow slot and the source of fluid pressure is interrupted, but vacuum is not admitted inside the finished article. Accordingly, in the case of an operable slot, the flow of fluid or connection to vacuum is controlled by a valve system that operates as follows: open to vacuum; closed to vacuum, open to pressure closed to pressure, open to atmosphere closed to pressure, closed to vacuum; blow slot closed **Figure 15** shows one embodiment of actuating the blow slot **970**. As shown, a spring **975** is provided, urging the movable element **971** forming the blow slot to open the latter. Stem **974** is provided with a fixed annular bar **976**. Spring **975** is affixed to stem **974** between bar **976** and internal ridge **977** on element **972**. When inserted into the injection station, the entering plastic will tend to counteract the force of spring **975** closing the blow slot. When the pressure of the entering plastic is relieved, spring **975** will tend to open the slot again. However, if no vacuum is applied, then atmospheric pressure will tend to close the slot or counteract the spring. Accordingly, the spring force chosen has to be such as to maintain the blow slot open against the atmospheric pressure so that vacuum may be applied.

The total force due to atmosphere pressure counteracting the spring is of course one atmosphere times the maximum projected area of the movable portion of the core assembly; $A^2 \pi / 4$. Accordingly, the force of the spring will be chosen well above that figure, for example, twice or three times that much, it being noted that the pressure of the plastic during injection is many times higher so that even with a

stronger spring the blow slot will still be closed during the injection step. Thus, the cores may be provided with means operative to close the blow slot under the pressure of incoming plastic and to open the blow slot when the pressure of the incoming plastic is relieved. If the blow slot is to be permanently open, it must of course be

5 held to a dimension precluding clogging thereof by penetration of the plastic while under pressure. That dimension is accordingly chosen according to the viscosity of the plastic at pressure molding temperature. In the case of very thin fluid plastics, e.g. relatively low molecular weight polyethylene and nylon, it is not possible to produce a narrow enough slot and to maintain it economically. In the case of most

10 amorphous plastics such as polystyrene, a permanently open slot may be used. As an improvement, the faces of the corresponding blow core components forming the slot are slightly tapered toward the outside as shown in **Figures 14 and 15**, i.e., the side facing away from the core, and they are preferably coated with a substance that prevents adhesion of the entering plastic to metal surfaces, e.g. teflon. In

15 consequence, any slight amount of penetration into the slot will be cured during the blowing step, at which time the plastic that will thus have entered the blow slot will be blown out. The above described apparatus features interact with the process, particularly because a critical relationship exists between the temperature of the plastic at any given stage and the rate and magnitude of the forming operation to

20 which it is subjected. The process injection blow-molding is of course aimed at providing a predetermined shape of the finished article. In addition, in most instances, as when converting brittle plastics into thin-walled objects the process is used to improve the properties of the plastic, such as strength, ductility, resistance to permeation, etc. by molecular orientation, the details of which are well known,

25 including the fact that the best levels of orientation are obtained by conducting the forming process at the lowest temperature compatible with the glass transition range of the given plastic that the chosen procedure is capable of.

In accordance with this invention, namely the manufacture of a bell fountain drinking cup as illustrated in **Figure 17(a)** from polycarbonate, the following process parameters can be used with the blow-molding apparatus and process as described in U.S. 4,540,543 and above. Initially, the polycarbonate in the form of pellets is dried to remove moisture. Drying conditions of 3.5 hours at 250°F have been found useful in providing a polycarbonate which can be injection blow-molded into the permaware containers of this invention. The polycarbonate plastic has to be pressure formed into the parison rapidly, hence the molten plastic temperature is left relatively high at from about 450°F to about 700°F, preferably, from about 500°F to about 650°F; and most preferably, a temperature of about 545°F has been found to yield the desired parison. Injection pressures of 1,000 to 3,000 psi can be used, with an injection pressure of about 2,100 psi being most preferred. The parison has to be removed from the parison mold after the shortest possible dwell therein in order to rapidly proceed to the next molding cycle, yet without tending to adhere to the mold and become deformed thereby. For permaware, which require a thicker parison, the time in the parison mold must yield a stable parison. Dwell times in the parison mold to produce the polycarbonate permaware of this invention range from about 1 to 3 seconds, with 2.5 seconds being most preferred. In general, the temperature of the parison has to reach a level suitable for orientation during the short dwell in the parison mold and the comparatively short time, shortened by the clamp action described herein, during which the parison is transported into the blow mold. The temperature at which the deformation of the parison, i.e., blowing takes place, should be uniformly maintained while the parison is expanding and until it contacts the parison mold. Temperatures ranging from about 250°F to about 500°F, and most preferably at about 285°F can be used. In no case must the parison be damaged, nor deformed in the course of any operation to which it is subjected, except of course blowing. A blowing pressure of from about 100 to about 500 psi, preferably, from about 200 to about 400 psi, and most preferably at about 250 psi, is employed. **Figures 17(a)** through **17(c)** illustrate

a bell fountain tumbler **979** injection blow-molded in accordance with the present invention. The tumbler can be prepared using a split blow cavity employing two separate halves which can be configured exactly the same or differently to provide separate design elements to the tumbler. For example, tumbler **979** can optionally be provided with an embossing design defined by embossed flat surfaces **988** and ridges **1004** which circumscribe the embossed areas **988**. The design is operative as a grip for a user since the smooth sidewall is substantially altered. Such tumblers are typically characterized by a seam **1001** along the longitudinal axis of the tumbler. The tumbler **979** has a base portion **980**, a sidewall portion **981** and an upper circular rim portion **982** which extends about the periphery **983** of an opening **984** of tumbler **979**. Base portion **980** of tumbler **979** is integrally formed with the rest of the tumbler and includes a bottom **985**, a base sidewall **987**, and an inner face **989** attached integrally to sidewall **981**. Tumbler **979** as shown is characterized as a "bell fountain" tumbler in which sidewall **981** extends upwardly to convex portion **990** which extends to concave portion **991** and extends to fortified rim **982**. Rim **982** is integrally formed with sidewall **981** and is a continuous generally circular or oval, solid polymer bead extending about periphery **983** of opening **984**. Rim **982** has the advantages that it is rounded and does not snag on the mold or snag with a cup cover as a top curl does. For another advantage, a bead type top rim can more compactly provide rigidity and strength to a cup than does a top curl, with less width. While polymer bead rim **982** is shown as circular in cross section, other profiles may be suitable for example, conic sections such as ellipsoid shapes or truncated conic sections or profiles such as truncated conic sections including a semi-circle or a half ellipse. Rim **982** has a width **W** which is defined by the difference between an inner diameter **993** and an outer diameter **994** of rim **982** and a height **H** which is the distance over which width **W** extends. Width **W** is thicker than the rest of sidewall **981**. Sidewall **981** is substantially uniform in thickness on the entire tumbler. In a preferred form of the bell fountain tumbler shown, sidewall **981** has at thickness of 80 mils, height **H** is approximately 100 mils and width **W** of rim **982** is approximately

100 mils. Also, base sidewall **987** preferably has a height or thickness of about 100 mils. While the base sidewall **987** can have a height up to 8 times the thickness of sidewall **81**, it has been found that under harsh washing conditions, the base tends to deteriorate if it is about 150 mils or more in the polycarbonate tumbler shown. The
 5 overall height of the preferred tumbler **979** is 6.625 inches, inner diameter **993** is 3.25 inches, base diameter is 2.325 inches and shoulder **990** has an inner diameter of 3.5 inches. As noted above, tumblers in accordance with the present invention are produced by injection blow-molding thermoplastic optically transparent polymers.

10 As discussed above, crystal polystyrene available from Dow Corporation of Midland, Michigan, grade 685d have been used to produce tumblers by the method of United States Patent No. 4,540,543. However, permaware products formed from polystyrene polymers using the injection blow-molding process described above do not have a consistent durability, are brittle and tend to break. Advantageously, the
 15 polycarbonate tumblers of the present invention provide a product having the same desirable clarity of polystyrene tumblers but are more durable such that the polycarbonate tumblers do not break during normal use. It is often desirable to incorporate at the bottom of a tumbler identifying indicia, including the location of the manufacturer, trademarks, even to mold into the bottom certain configurations
 20 which enable the tumbler to be printed or packaged.

Referring to **Figure 17(b)**, it can be seen that the bottom of base **985** has been molded to include a concave, flat portion **986** which includes a rim **1005**, both of which locations can be used to imprint product identifying indicia (not shown).
 25 **Figure 17(b)** also shows where a lug **1006** has been molded into the bottom **985** of base **980**. Molded lug **1006** can be used to align the tumbler during any subsequent printing operation. Previous to this invention, the incorporation of such molded indicia or components to the base of a blow-molded article, in particular, an article in which the wall thickness was greater than 50 mil, required a separate noncontinuous

step in which the article, such as a tumbler needed to be taken from the blow mold at an elevated temperature, and conveyed by a separate conveyor structure to a stamping operation. For relatively thick walled structures including those having a wall thickness of greater than 50 mils, the molding of the indicia could not take place during blow-molding since the fluid pressure during the blowing step could not press the parison to be molded sufficiently hard against a mold surface to provide acceptable indicia or deep structural configurations to the surface such as the printing lug **1006** shown in **Figure 17(b)**. In a novel aspect of the present invention, the polycarbonate tumbler of the present invention can be blow-molded and the base thereof reconfigured in a continuous manner without the need to remove the tumbler from the blow mold and convey the tumbler away from the apparatus to a separate stamping operation. The base molding method and apparatus which are novel to the present invention can be described by referring to **Figure 18**. Thus, after removal of the core from the blow-molding station, as described above, an alternative ejection core can be inserted into the blow cavity which contains the blow-molded container. This alternative ejection core provides a slight pressure against the inside surface of the container pressing the bottom surface of the container against a preformed mold. More specifically, shown in **Figure 18** is the blow cavity **1010** of a blow mold such as a blow station **913** as shown in **Figure 11**. Within the blow cavity is the blow-molded tumbler **1012** which includes a sidewall **1014** and a base **1016** which has a bottom surface **1018** which is to be provided with indicia or other structural configurations such as printing lug **1006** as shown in **Figure 17(b)**.

In accordance with the molding operation of the present invention, after the blow-molding step and once the core has been removed from the blow mold **1010** of **Figure 18**, for example, an ejection core **1020** is inserted into the blow cavity **1010** and the tumbler **1012** which remains therein. Ejection core **1020** is wide enough to contact the inside edge of sidewall **1014** near or at the base **1016** of tumbler **1012**. Such contact is shown at location **1022**. Bottom edge **1024** of ejection core **1020**

contacts the inside surface of base **1016** and pushes the tumbler **1012** against a mold **1026**. Ejection core **1020** can also include a circumferential lip **1021** which engages the lip **1013** of tumbler **1012** so as to aid in pushing tumbler **1012** uniformly against the surface of mold **1026**. In **Figure 18**, mold **1026** is shown containing a mold

5 configuration **1028** which is capable of forming a printing lug on the bottom **1018** of base **1016** such as equivalent to printing lug **1006** shown in **Figure 17(b)**. Mold **1026** can be secured to blow cavity **1010** via threaded connector **1027**. It has been found that the mechanical pressure of ejection core **1020** against the inside surface of base **1016** provides adequate pressure against the mold **1026** to adequately stamp any

10 indicia or other configuration into the base of the tumbler. Typically, the pressure of the ejection core **1020** against the base **1016** within the blow cavity to mold or stamp the base takes approximately 0.5 second. Mold **1026** can include a cooling channel **1030** to provide the cooling of the base subsequent to the molding operation. Likewise, ejection core **1020** can also be provided with a cooling channel **1032**. In

15 each of cooling channels **1030** and **1032**, cooling fluids such as water can be circulated therein to provide the proper temperature. Subsequent to the molding or stamping operation, the ejection core **1020** is removed from the blow cavity. Since the mandrel **1020** contacts the inside sidewall **1014** of tumbler **1012**, the tumbler is removed from the blow cavity as well and transferred to any conveying station as

20 described previously. The ejection core **1020** is an alternative to the ejection core **950** shown in **Figures 11, 12 and 13** and can be attached to a motive means as described above with respect to core **950** to provide a continuous process of injection blow-molding and molding the base of the tumbler. Another improvement in this invention for injection blow-molding permaaware polycarbonate tumblers in which a sidewall

25 thickness of greater than **950** mils is provided is shown in **Figure 19**. **Figure 19** is an alternative blow mold cavity configuration which is different than, for example, the blow cores shown in **Figures 14 and 15**. Thus, in the previous description, blowing of the parison into the molded tumbler was achieved by directing fluid through a blow slot in the core which directed the fluid at the base of the parison

mold. Subsequently, the fluid pressure would work its way up the mold and be
 vented from the entrance of the mold. With respect to the tumbler, the initial fluid
 pressure would be at the base of the tumbler and work its way along the sidewall to
 the tumbler opening. In accordance with this invention, it has been found that a
 5 uniform blow-molded tumbler can be better achieved by directing the fluid pressure
 during the blow stage from the top of the mold and working down toward the base of
 the blow cavity or, with respect to the tumbler, blowing the parison at the opening of
 the tumbler and working down toward the base of the tumbler. Such configuration is
 shown in **Figure 19** which includes a blow cavity **1040** into which has already been
 10 inserted the core **1042** which contains the injected molded parison **1044** contained
 along the outside surface of core **1042**. The blow cavity **1040** includes a mold **1046**
 in the shape of the bell fountain tumbler shown in **Figure 17(a)**. The core **1042**
 includes a blow vent **1048** which releases a fluid into the mold **1046** of blow cavity
 15 **1040** near the entrance thereof or with respect to the tumbler, near the opening of the
 tumbler. The fluid pressure travels down the core **1042** blowing and pressing the
 parison **1044** against mold **1046** from the top of the parison to the base **1050** of the
 parison. Blow cavity **1040** also includes the base mold **1026** as described in **Figure**
18 which allows the molding of the base of the blow-molded tumbler once core **1042**
 is removed and ejection core **1020** is inserted. Mold **1026** includes a vent **1052**
 20 connected to blow cavity **1040** to vent excess fluid pressure. It has been found that a
 more uniform sidewall can be achieved by blowing from the opening of the
 parison/tumbler to the base thereof. This method of blowing the parison has
 previously been done to blow polystyrene disposable containers but is not believed to
 have been done with resins other than polystyrene and not to form permaware
 25 tumblers having sidewall thicknesses of greater than 50 mils. The reusable containers
 of the present invention are formed from aromatic polycarbonates preferably having a
 weight average molecular weight of from about 10,000 to 200,000, most preferably
 from about 20,000 to 80,000, and most particularly a melt flow rate range of from
 about 10 to 22 g/10 min (ASTM D-1238) and which are prepared by methods known


to those skilled in the art and more particularly by methods disclosed in U.S. Pat. Nos. 3,028,365, 2,999,846, 3,248,414, 3,153,008, 3,215,668, 3,187,065, 2,964,794, 2,970,131, 2,991,273 and 2,999,835, all incorporated herein by reference. The aromatic polycarbonates useful in practice of the invention are produced by reacting

5 di-(monohydroxyaryl)-alkanes (bisphenols) or dihydroxybenzenes and substituted dihydroxybenzenes with derivatives of carbonic acid such as carbonic acid diesters, phosgene, bis-chlorocarbonic acid esters of di-(monohydroxyaryl)-alkanes and the bis-chlorocarbonic acid esters of the dihydroxy-benzenes and the substituted dihydroxy-benzenes. By aromatic polycarbonate, in the sense of the present invention,


10 there are understood homopolycarbonate and copolycarbonate resins which are based, for example, on one or more of the following bisphenols: hydroquinone, resorcinol, dihydroxydiphenyls, bis-(hydroxyphenyl)-alkanes, bis-(hydroxyphenyl)-cycloalkanes, bis-(hydroxyphenyl)-sulphides, bis-(hydroxyphenyl)-ethers, bis-(hydroxyphenyl)-ketones, bis-(hydroxyphenyl)-sulphoxides, bis-(hydroxyphenyl)-

15 sulphones and α , α -bis-(hydroxyphenyl)-diisopropylbenzenes, as well as their nuclear-alkylated and nuclear-halogenated compounds. These and further suitable aromatic dihydroxy compounds are described, for example, in U.S. Pat. Nos. 3,028,365, 2,999,835, 3,148,172, 3,271,368, 2,991,273, 3,271,367, 3,280,078, 3,014,891 and 2,999,846 (all incorporated herein by reference), in German

20 Offenlegungsschriften (German Published Specifications) 1,570,703, 2,063,050, 2,063,052, 2,211,956 and 2,211,957, in French Patent Specification No. 1,561,518 and in the monograph "*H. Schnell*, Chemistry and Physics of Polycarbonates, Interscience Publishers, New York, 1964". Preferred bisphenols are those of the formula I:

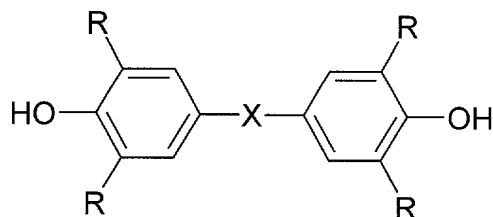

5 in which R is identical or different and denotes H, C₁-C₄-alkyl, C1 or Br; preferably H or C₁-C₄-alkyl, and in which X is a bond, C₁-C₈-alkylene, C₂-C₈-alkylidene, C₅-C₁₅-cycloalkylene, C₅-C₁₅-cycloalkylidene, -S-, -SO₂-, -SO-, -CO- or



10

Examples of these bisphenols are: 4,4'-dihydroxydiphenyl, 2,2-bis-(4-hydroxyphenyl)-propane (bisphenol A), 2,4-bis-(4-hydroxyphenyl)-2-methylbutane, 1,1-bis-(4-hydroxyphenyl)-cyclohexane, α, α-bis-(4-hydroxyphenyl)-p-diisopropyl-
 15 benzene, 2,2-bis-(3-methyl-4-hydroxyphenyl)-propane, 2,2-bis-(3-chloro-4-hydroxyphenyl)-propane, bis-(3,5-dimethyl-4-hydroxyphenyl)-methane, 2,2-bis-(3,5-dimethyl-4-hydroxyphenyl)-propane, bis(3,5-dimethyl-4-hydroxyphenyl)-sulphone, 2,4-bis-(3,5-dimethyl-4-hydroxyphenyl)-methylbutane, 1,1-bis-(3,5-dimethyl-4-hydroxyphenyl)-cyclohexane, α,α-bis-(3,5-dimethyl-4-hydroxyphenyl)-p-
 20 diisopropyl-benzene, 2,2-bis-(3,5-dichloro-4-hydroxyphenyl)-propane and 2,2-bis-(3,5-dichloro-4-hydroxyphenyl)-propane and 2,2-bis-(3,5-dibromo-4-hydroxyphenyl)-propane (tetrabromo bisphenol A).

Examples of particularly preferred bisphenols are: 2,2-bis-(4-hydroxyphenyl)-propane, 2,2-bis-(3,5-dimethyl-4-hydroxyphenyl)-propane, 2,2-bis-(3,5-dichloro-4-hydroxyphenyl)-propane, 2,2-bis-(3,5-dibromo-4-hydroxyphenyl)-propane and 1,1-bis-(4-hydroxyphenyl)-cyclohexane.

5

Preferred aromatic polycarbonates are those which are based on one or more of the bisphenols mentioned as being preferred. Particularly preferred copolycarbonates are those based on 2,2-bis-(hydroxyphenyl)-propane and one of the other bisphenols mentioned as being particularly preferred. Further particularly preferred polycarbonates are those based solely on 2,2-bis-(4-hydroxyphenyl)-propane or 2,2-bis-(3,5-dimethyl-4-hydroxyphenyl)-propane.

10

The aromatic high-molecular weight polycarbonates can be branched due to the incorporation of small amounts, preferably of between about 0.05 and 2.0 mol % (relative to diphenols employed), or trifunctional or more than trifunctional compounds, especially compounds with three or more phenolic hydroxyl groups. Polycarbonates of this type are described, for example, in German Offenlegungsschriften (German Published Specifications) 1,570,533, 1,595,762, 2,116,974 and 2,113,347, British Patent Specifications No. 3,544,514 (incorporated herein by reference).

15

20

Some examples of compounds with three or more than three phenolic hydroxyl groups which can be used are phloroglucinol, 4,6-dimethyl-2,4,6-tri-(4-hydroxyphenyl)-heptane-2,4,6-dimethyl-2,4,6-tri-(4-hydroxyphenyl)-heptane, 1,4,5-tri-(4-hydroxyphenyl)-benzene, 1,1,1-tri(4-hydroxyphenyl)ethane tri-(4-hydroxyphenyl)-phenylmethane, 2,2-bis-[4,4-bis-(4-hydroxyphenyl)-cyclohexyl]-phenol, 2,6-bis-(4-hydroxyphenyl-isopropyl)-phenol, 2,6-bis-(2-hydroxy-5'-methylbenzyl)-4-methylphenol, 2-(4-hydroxyphenyl)-2-(2,4-dihydroxyphenyl)-propane, hexa(4-(4-hydroxyphenylisopropyl)phenyl) orthoterephthalic acid ester,

25

tetra-(4-hydroxyphenyl)-methane, tetra(4-(4-hydroxyphenylisopropyl)-phenoxy)-methane and 1,4-bis-((4',4''-dihydroxytriphenyl)-methyl)-benzene. Some of the other trifunctional compounds are 2,4-dihydroxybenzoic acid, trimesic acid, cyanuric chloride and 3,3-bis-(4-hydroxyphenyl)-2-oxo-2, 3-dihydroindole.

5

Particularly preferred polycarbonates which can be used to injection blow mold the permaware containers of this invention are the Calibre 200 Series polycarbonates from Dow Chemical Canada, Inc., Sarnia, Ontario. Specifically, Calibre 200-22 has been found particularly useful.

10

In high speed operation, such as the one at which this invention is aimed, several factors have to be reconciled: the plastic has to be pressure formed rapidly, hence its temperature is left relatively high; the parison has to be removed from the parison mold after the shortest possible dwell therein, in order to proceed to the next molding cycle, all without tending to adhere to the mold and becoming deformed thereby; the temperature of the parison has to reach a level suitable for orientation during the short dwell in the parison mold and the comparatively short time, shortened by the clamp action described herein, during which the parison is transported into the blow mold; the temperature at which the deformation of the parison, i.e., blowing takes place should be uniformly maintained while the parison is expanding and until it contacts the parison mold; in no case must the parison be damaged, nor deformed in the course of any operation to which it is subjected, except of course blowing.

15

20

25

A typical use of this invention in another aspect will serve as an example hereinbelow, namely the manufacture of a thin-walled drinking cup of generally known configuration, from polystyrene, e.g. Styron 685 made by the Dow Chemical Company. In order to obtain satisfactory filling of the mold at a fast rate, it is

injected at 560°-570°F. The parison tends to adhere to the parison mold cavity wall until its temperature drops to approximately 150°F. The newly molded parison, with a wall thickness increasing from 0.3 mm to 0.6mm from its open end towards its bottom dwells in the parison mold for approximately 0.8 seconds with the mold cavity wall at a temperature of 140°F which is long enough for the parison to become removable without sticking. The core in turn is kept at a temperature of 260°F for the most part, with the region near the blow slot separately controlled at 220°F or slightly lower to minimize penetration of the plastic thereinto.

As a result, temperatures of the inner and outer surface of the parison are so balanced under action of the core and mold respectively that said parison remains highly deformable while being readily separated from the parison mold cavity and transferred to the blow mold. Once placed into the blow mold, a blowing pressure of 100-300 psi is applied which may be accompanied by forward movement of pusher plate 952 in order to center the parison or the movable element of the blow core shown in **Figure 15**, to stretch it into contact with the blow mold. If such movement of the blow core element is used, it must not precede initiation of blowing, so as to assure that no friction or adhesion exists between the parison and the core while the former is being moved axially.

The injection blow-molding process and apparatus disclosed in U.S. 4,540,543 have been used to form containers, cups, tumblers and the like from thermoplastic optically transparent polymers, in particular, from polystyrene. Such containers were disposable having a nominal sidewall thickness substantially less than 50 mils. Permaware products, such as those having thicknesses of greater than 50 mils, and formed from polystyrene polymers using the injection blow-molding process described above do not have a consistent durability, are brittle and tend to break. Accordingly, there has been a need to find alternative polymers which can be

injection blow-molded using the process described above and which can provide a product having the same desirable clarity of polystyrene tumblers but which are more durable.

5 In accordance with still yet another aspect of the present invention, it has been found that the injection blow-molding process described in U.S. 4,540,543 can be operated to form hollow containers using resins other than unfilled polystyrene which is the only polymer disclosed in the mentioned patent. Thus, it has been found that polycarbonate, polyethylene terephthalate, polycarbonate and ABS mixtures, acrylic
10 resins, clarified polypropylene and polyvinylchloride, as well as the filled polymers described above, can be successfully injection blow-molded into transparent containers. Additionally, the other resin or mixed resin alternatives to unfilled polystyrene which are useful in this invention include filled resins such as filled polystyrene, polycarbonate, polyethylene terephthalate, mixtures of polycarbonate
15 and ABS resins, acrylic resins, clarified polypropylene and polyvinyl chloride. It is most advantageous that the filled resin systems have the flowability necessary for injection blow-molding, can maintain at least the initial strength of the unfilled resin and, in particular, remain transparent which is a highly desired property when injection blow-molding containers such as plastic drinking tumblers or "glasses".
20 Accordingly, the process of the present invention is particularly useful in injection blow-molding transparent drinking containers from filled resins which have been characterized as "nano-composites". Nano-composites are reinforced resins which comprise the resins enumerated above and nanometer-sized filler particles. It has been found that resins containing small amounts of approximately 2-5% of the
25 nanometer-sized particles can provide improvements in mechanical and thermal properties, improvements in gas barrier and flame resistance and do not reduce the light transmission of the resins inasmuch as the nanometer-sized particles are in the same size range as visible light wave lengths. A discussion of nano-composites is provided in *Plastics Technology*, June, 1999. Accordingly, nano-composites can

advantageously be used to injection blow mold drinking containers such as tumblers and the like. Thus, not only would the transparent nature of the resins be maintained, but the strength of the resin could be improved. For polystyrene, the use of a nanometer-sized filler could improve the strength of the resin and provide more uses
 5 of this resin than for just disposable tumblers.

At present, nanometer-sized clay has been used to form nano-composites. For example, montmorillonite, which is a layered alumino-silicate having individual platelets that measure on the order of 1 micron diameter and have an aspect ratio of
 10 1,000:1 have been added to nylon. Suppliers of the nanometer montmorillonite are Nanocor, Inc. And Southern Clay Products. For some of the above listed resins, it may be useful to chemically modify the surface of the montmorillonite inasmuch as this hydrophilic clay may not be compatible with the more hydrophobic resins. Surface treatments can include exchanging the inorganic cations on the surface of the
 15 clay with materials which can induce hydrogen bonding with the resin including hydrogen cations, ammonium cations, silane cations and the like. Other fillers can be formed chemically or ground to the appropriate size and used as fillers for the injection blow moldable resins of this invention. For example, inorganic or organic pigments such as zinc oxide, or titanium oxide can be used. Even plastic fillers can
 20 be provided in nanometer sizes and added to the blow moldable resins.

The nanocomposites can be formed by forming the resin itself in the presence of the nano-filler particles or by simply melt compounding the formed resin with the nano-filler particles. During the melt compounding method of forming nano-clay
 25 composites, it has been found necessary to delaminate the clay particles sufficiently so that the ultimate level of reinforcement and transparency can be achieved.

The injection blow-molding of these alternative resins can be used to form both disposable and permaware containers having nominal sidewall thicknesses of

from 10 to 50 mils and greater than 50 mils to 500 mils, respectively. While each of the resins may need to be processed differently from the others, typically, the molten resin is pressure formed into the parison rapidly, at a relatively high temperature ranging from about 300° to 850°F so as to form the desired parison. Injection
5 pressures of 1,00 to 3,500 psi can be used. Dwell times of the parison in the parison mold will generally range from 0.5 to 3.5 seconds depending on the setting ability of the polymer used and the thickness of the article to be formed. The temperature at which the deformation of the parison, i.e., blow-molding, takes place should be uniformly maintained while the parison is expanding and until it contacts the blow
10 cavity mold. Temperatures ranging from about 200° to 600°F can be used. In no case must the parison be damaged, nor deformed in the course of any operation to which it is subjected, except of course blowing. A blowing pressure of from about 100 to 500 psi, preferably from about 200 to 400 psi can be employed.

15 It is often desirable to incorporate at the bottom of a tumbler identifying indicia, including the location of the manufacturer, trademarks, even to mold into the bottom certain configurations which enable the tumbler to be printed or packaged. For example, one or more molded lugs can be molded into the base of the container and used to align the container during any subsequent printing operation. Previous to
20 this invention, the incorporation of such molded indicia or components to the base of a blow-molded article, in particular, an article in which the wall thickness was greater than 50 mil, required a separate noncontinuous step in which the article, such as a tumbler needed to be taken from the blow mold at an elevated temperature, and conveyed by a conveyor structure to a separate stamping operation. For relatively
25 thick walled structures including those having a wall thickness of greater than 50 mils, the molding of the indicia could not take place during blow-molding since the fluid pressure during the blowing step could not press the parison to be molded

sufficiently hard against a mold surface to mold acceptable indicia or deep structural configurations such as a printing lug into the surface.

In a novel aspect of the present invention, containers such as cups, tumblers
 5 and the like can be blow-molded and the base thereof reconfigured in a continuous manner without the need to remove the tumbler from the blow mold and convey the tumbler away from the apparatus to a separate stamping operation.

The base molding method and apparatus which are novel to the present
 10 invention in one embodiment can be described by referring to **Figure 18**. Thus, after removal of the core from the blow-molding station, as described above, an alternative ejection core can be inserted into the blow cavity which contains the blow-molded container. This alternative ejection core provides a slight pressure against the inside surface of the cup pressing the bottom surface of the cup against a preformed mold.
 15 More specifically, shown in **Figure 18** is the blow cavity **1010** of a blow mold such as a blow station **913** as shown in **Figure 11**. Within the blow cavity is the blow-molded tumbler **1012** in the form of a “bell fountain” tumbler which includes a sidewall **1014** and a base **1016** which has a bottom surface **1018** which is to be provided with indicia or other structural configurations such as a printing. In
 20 accordance with the molding operation of the present invention, once the core has been removed from the blow mold **1010** subsequent to the blowing step, an ejection core **1020** is inserted into the blow cavity **1010** and the tumbler **1012** which remains therein. Ejection core **1020** is wide enough to contact the inside edge of sidewall **1014** near or at the base **1016** of tumbler **1012**. Such contact is shown at location
 25 **1022**. Bottom edge **1024** of ejection core **1020** contacts the inside surface of base **1016** and pushes the tumbler **1012** against a mold **1026**. Ejection core **1020** can also include a circumferential lip **1021** which engages the lip **1013** of tumbler **1012** so as to aid in pushing tumbler **1012** uniformly against the surface of mold **1026**. In **Figure 18**, mold **1026** is shown containing a mold configuration **1028** which is

capable of forming a printing lug on the bottom 1018 of base **1016**. Mold **1026** can contain other mold features including indicia or trademark logos and the like. Mold **1026** can be secured to blow cavity **1010** via threaded connector **1027**. It has been found that the mechanical pressure of ejection core **1020** against the inside surface of base **1016** provides adequate pressure against the mold **1026** to adequately stamp any indicia or other configuration into the base of the tumbler. Typically, the pressure of the ejection core **1020** against the base **1016** within the blow cavity to mold or stamp the base takes approximately 0.5 second. Mold **1026** can include a cooling channel **1030** to provide the cooling of the base subsequent to the molding operation.

Likewise, ejection core **1020** can also be provided with a cooling channel **1032**. In each of cooling channels **1030** and **1032**, cooling fluids such as water can be circulated therein to provide the proper temperature. Subsequent to the molding or stamping operation, the ejection core **1020** is removed from the blow cavity. Since the mandrel **1020** contacts the inside sidewall **1014** of tumbler **1012**, the tumbler is removed from the blow cavity as well and transferred to any conveying station as described previously. The ejection core **1020** is an alternative to the ejection core **950** shown in **Figures 11, 12 and 13** and can be attached to a motive means as described above with respect to core **950** to provide a continuous process of injection blow-molding and molding the base of the tumbler.

Another improvement relative to U.S. 4,540,543 is shown in **Figure 19**.

Figure 19 is an alternative blow mold cavity configuration which is different than, for example, the blow cores shown in **Figures 14 and 15**. Thus, in the previous description, blowing of the parison into the molded tumbler was achieved by directing fluid through a blow slot in the core which directed the fluid at the base of the parison mold. Subsequently, the fluid pressure would work its way up the mold and be vented from the entrance of the mold. With respect to the tumbler, the initial fluid pressure would be at the base of the tumbler and work its way along the sidewall to the tumbler opening. In accordance with this invention, it has been found that a

uniform blow-molded tumbler can be better achieved by directing the fluid pressure during the blow stage from the top of the mold and working down toward the base of the blow cavity or, with respect to the tumbler, blowing the parison at the opening of the tumbler and working down toward the base of the tumbler. Such configuration is shown in **Figure 19** which includes a blow cavity **1040** into which has already been inserted the core **1042** which contains the injected molded parison **1044** contained along the outside surface of core **1042**. The blow cavity **1040** includes a mold **1046** in the shape of the bell fountain tumbler. The core **1042** includes a blow vent **1048** which releases a fluid into the mold **1046** of blow cavity **1040** near the entrance thereof or with respect to the tumbler, near the opening of the tumbler. The fluid pressure travels down the core **1042** blowing and pressing the parison **1044** against mold **1046** from the top of the parison to the base **1050** of the parison. Blow cavity **1040** also includes the base mold **1026** as described in **Figure 18** which allows the molding of the base of the blow-molded tumbler once core **1042** is removed and ejection core **1020** is inserted. Mold **1026** includes a vent **1052** connected to blow cavity **1040** to vent excess fluid pressure. It has been found that a more uniform sidewall can be achieved by blowing from the opening of the parison/tumbler to the base thereof. This method of blowing the parison has previously been done to blow polystyrene disposable containers but is not believed to have been done with resins other than polystyrene and not to form permaware tumblers having sidewall thicknesses of greater than 50 mils.

Optical/Physical Properties

The inventive tumblers characteristically exhibit enhanced optical properties and crack resistance over prior art disposable cups. Unless otherwise indicated, cups described below are fabricated from unfilled resins. There is shown in Table 2 below a comparison of haze values of an injection blow-molded tumbler of **Figure 8** made from PET with corresponding thermoformed cups.

Table 2. Optical Properties

HAZE VALUES

	Injection Blow-Molded Tumbler of Figure 8 (PET)	Thermoformed PET Cup 1	Thermoformed PET Cup 2
1	1.33	4.34	3.97
2	1.22	2.82	2.94
3	1.38	3.00	7.92
4	1.41	3.13	4.62
5	1.91	2.98	4.42
6	1.48	2.52	
Avg	1.46	3.13	4.77
Std	0.239	0.628	1.875

5 Tumblers with a fortified, beaded rim produced in accordance with the present invention likewise exhibit improved toughness over cups with a “U” shaped upper rim as are known. In this regard, a test was devised to simulate impact resistance as follows:

10 The tumblers (or tumbler stack in the case of a nested column) were clamped about their bases to be in a free-standing position and a cylindrical suspended weight was positioned to be at rest with its cylinder wall adjacent the rim of the tumbler. The weight was then drawn to a predetermined angle from the vertical and released. The angle with vertical at failure was recorded and the energy dissipated at impact was
15 calculated based on the height to which the cylindrical weight was raised above the rest position.

Utilizing the above procedure, polystyrene cups having the general characteristics of the cups of **Figure 8** (“beaded”) were compared with similar cups
20 with a “U” shaped brim. The cups of the invention had a wall thickness of about 15

mils and a bead thickness of 63.7 mils about its brim. Results appear in Table 3, wherein it can be seen the cups of the invention exhibit an energy to failure of nearly twice that of cups with a “U” shaped brim.

5 Table 3. Pendulum Test Energy to Failure for Beaded and “U” Shaped Brim Polystyrene Cups (Nested Cups)

Cup ID	Pendulum Weight lbs	Pendulum Length inches	Pendulum Angle At Failure Degree	Energy to Failure lb-in	Energy to Failure Average
Beaded	0.941816	25.5	20	1.45	
Beaded	0.941816	25.5	25	2.25	
Beaded	0.941816	25.5	25	2.25	
Beaded	0.941816	25.5	25.	2.25	
Beaded	0.941816	25.5	25	2.25	2.09
“U”	0.941816	25.5	20	1.45	
“U”	0.941816	25.5	15	0.82	
“U”	0.941816	25.5	15	0.82	
“U”	0.941816	25.5	15	0.82	
“U”	0.941816	25.5	20	1.45	1.07

10 The material from which the cups are made likewise affects the toughness of the product as does the various design elements of the tumbler. Utilizing the above procedure (with tighter clamping of the cups) tumblers having the general characteristics of **Figures 3(a) – 3(c)** were tested for impact resistance as indicated in Table 4, as well as for crush loads and deflections (Instron).

The various tumblers of Table 4 had the characteristics noted as well as the following:

1. Tumbler A had a wall thickness of 0.0218 inches and a rim bead thickness of 0.030 inches;
2. Tumbler B had a wall thickness of 0.0227 inches and a rim bead diameter of 0.047 inches; and
3. Tumbler C likewise had a wall thickness of 0.0227 inches and a rim bead diameter of 0.047 inches.

The particular grade of PET employed for Tumbler C was MN058, available from Eastman Chemicals, Kingsport, Tennessee.

Table 4. "Cut Glass" IBM Tumbler Data

Tumbler	Material	Volume (oz)	Cup Height (in)	Weight (g)	Brim Crush Disp. (in)	Brim Crush Load (lbf)	Brim Crush Energy (lbf-in)	Cup Rigidity Dry (lb)	Pendulum Failure Angle (Degree)	Pendulum Energy (lbf-in)	Failure Mode
A	PS	14	5.75	17.27	1.58	3.63	2.69	1.53	20.0	6.6	Pieces
B	PS	14	5.75	18.82	1.20	4.08	1.72	2.18	17.0	4.1	Cracks
C	PET	14	5.75	24.99	1.78	7.40	6.06	1.84	35.0	16.9	Creases

The material employed likewise has a corresponding effect on the impact resistance of the cups of Figure 8. Utilizing the above procedures, cups designed in accordance with Figure 8 having a volume of 16 ounces, a wall thickness of 15 mils and a rim bead diameter of 0.0637 inches were fabricated and tested as shown in Table 5.

Table 5. Impact/Rigidity/Crush for PET Tumblers

Tumbler	Material	Volume (oz)	Cup Height (in)	Weight (g)	Brim Crush Disp. (in)	Brim Crush Load (lbf)	Brim Crush Energy (lbf-in)	Bottom Crush Disp. (in)	Bottom Crush Load (lbf)	Bottom Crush Energy (lbf-in)	Cup Rigidity Dry (lb)	Pendulum		
												Failure Angle (Degree)	Energy to Break (lbf-in)	Failure Mode
D	PET	16	4.90	24.10	1.57	4.65	3.90	0.11	40.44	2.23	0.85	42.0	24.0	Minor creases
E	PET	16	4.90	24.60	1.58	4.70	4.01	0.12	49.64	3.19	0.86	40.0	21.9	Minor creases
F	PET	16	4.90	24.02	1.50	4.39	3.50	0.12	49.87	3.06	0.83	45.0	27.4	Minor creases

It can be seen from Table 5 that PET cups with dimensions similar to the polystyrene cups of Table 3 exhibit greatly enhanced impact resistance.

Still yet another material useful for the present invention is K resin (Phillips Petroleum). Utilizing the procedures detailed above, there is shown in Table 6 a comparison of a polystyrene tumbler (Sample G) having the configuration of the tumbler of **Figure 8** hereof with a K resin/polystyrene (11.5% butadiene) tumbler (Sample H) having the configuration of **Figure 8**. The tumbler of Sample H was made with a K resin having 24.5 wt.% butadiene blended with polystyrene.

K resin is a copolymer of styrene and butadiene and is available from Phillips Petroleum, Bartlesville, Oklahoma. Particularly preferred grades included from about 2 to about 40 wt.% butadiene.

It can be seen from Table 6 that K resin tumblers in accordance with the invention exhibit high impact resistance.

The polymeric composition of this invention may further contain one or more agents to improve the impact strength, i.e., an impact modifier other than or in addition to butadiene/styrene copolymers.

So-called core-shell polymers built up from a rubber-like core on which one or more shells have been grafted may be used. The core usually consists substantially of an acrylate rubber or a butadiene rubber. One or more shells have been grafted on the core. Usually these shells are built up for the greater part from a vinylaromatic compound and/or a vinylcyanide and/or an alkyl(meth)acrylate and/or (meth)acrylic acid. The core and/or the shell(s) often comprise multi-functional compounds which

may act as a cross-linking agent and/or as a grafting agent. These polymers are usually prepared in several stages.

Olefin-containing copolymers such as olefin acrylates and olefin diene terpolymers can also be used as impact modifiers in the present compositions. An example of an olefin acrylate copolymer impact modifier is ethylene ethylacrylate copolymer available from Union Carbide as DPD-6169. Other higher olefin monomers can be employed as copolymers with alkyl acrylates, for example, propylene and n-butyl acrylate. The olefin diene terpolymers are well known in the art and generally fall into the EPDM (ethylene propylene diene) family of terpolymers. They are commercially available such as, for example, EPSYN 704 from Copolymer Rubber Company. They are more fully described in U.S. Patent No. 4,559,388, incorporated by reference herein.

Various rubber polymers and copolymers can also be employed as impact modifiers. Examples of such rubbery polymers are polybutadiene, polyisoprene, and various other polymers or copolymers having a rubbery dienic monomer.

Styrene-containing polymers can also be used as impact modifiers. Examples of such polymers are acrylonitrile-butadiene-styrene, styrene-acrylonitrile, acrylonitrile-butadiene-alpha-methylstyrene, styrene-butadiene, styrene butadiene styrene, diethylene butadiene styrene, methacrylate-butadiene-styrene, high rubber graft ABS, and other high impact styrene-containing polymers such as, for example, high impact polystyrene. Other known impact modifiers include various elastomeric materials such as organic silicone rubbers, elastomeric fluorohydrocarbons, elastomeric polyesters, the random block polysiloxane-polycarbonate copolymers, and the like. The preferred organopolysiloxane-polycarbonate block copolymers are the dimethylsiloxane-polycarbonate block copolymers in some embodiments.

Table 6. Comparison of K Resin/Polystyrene Tumbler

Sample	Volume (oz)	Cup Height (in)	Weight (g)	Brim Crush				Bottom Crush				Cup Rigidity Dry (lb)	Disagreeabl e Odor Scale 0-10	Pendulum			
				Displ.	Load	Energy	Failure Mode	Displ.	Load	Energy	Failure Mode			Failure Angle (Degree)	Energy to break (lbf-in)	Failure mode	Sample size
G	16	4.88	17.50	0.95	3.38	1.73	Cracks	0.08	26.00	1.01	Cracks	0.97	2	20	5.6	60% cracks 40% pieces	10
H	16	4.88	17.21	2.08	3.65	4.63	Crease s	0.11	34.07	1.63	Crease s	0.57	7	33.5	15.5	60% cracks 40% creases	10

Injection blow-molded tumblers may be produced in accordance with the present invention utilizing polymeric compositions filled with conventional inorganic fillers such as talc, mica, wollastonite and the like, wherein the polymer component is, for example, a polyester, a polystyrene homopolymer or copolymer, or a polyolefin. While any suitable polymer may be used, polypropylene polymers which are suitable are preferably selected from the group consisting of isotactic polypropylene, and copolymers of propylene and ethylene wherein the ethylene moiety is less than about 10% of the units making up the polymer, and mixtures thereof. Generally, such polymers have a melt flow index from about 0.3 to about 4, but most preferably the polymer is isotactic polypropylene with a melt-flow index of about 1.5. In some preferred embodiments, the melt-compounded composition from which the articles are made may include polypropylene and optionally further includes a polyethylene component and titanium dioxide. A polyethylene polymer or component may be any suitable polyethylene such as HDPE, LDPE, MDPE, LLDPE or mixtures thereof and may be melt-blended with polypropylene if so desired.

The various polyethylene polymers referred to herein are described at length in the *Encyclopedia of Polymer Science & Engineering* (2d Ed.), Vol. 6; pp: 383-522, Wiley 1986; the disclosure of which is incorporated herein by reference. HDPE refers to high density polyethylene which is substantially linear and has a density of generally greater than 0.94 up to about 0.97 g/cc. LDPE refers to low density polyethylene which is characterized by relatively long chain branching and a density of about 0.912 to about 0.925 g/cc. LLDPE or linear low density polyethylene is characterized by short chain branching and a density of from about 0.92 to about 0.94 g/cc. Finally, intermediate density polyethylene (MDPE) is characterized by relatively low branching and a density of from about 0.925 to about 0.94 g/cc.

Typically, in filled plastics the primary mineral filler is mica, talc, kaolin, bentonite, wollastonite, milled glass fiber, glass beads (solid or hollow), silica, or

silicon carbide whiskers or mixtures thereof. We have discovered that polypropylene may be melt-compounded with acidic-type minerals such as mica, as well as inorganic materials and/or basic materials such as calcium carbonate, talc, barium sulfate, calcium sulfate, magnesium sulfate, clays, glass, dolomite, alumina, ceramics, calcium carbide, silica, pigments such as titanium dioxide based pigments and so on. Many of these materials are enumerated in the *Encyclopedia of Materials Science and Engineering*, Vol. # 3, pp. 1745 – 1759, MIT Press, Cambridge, MA (1986), the disclosure of which is incorporated herein by reference. Combinations of fillers are preferred in some embodiments.

10

Mineral fillers are sometimes referred to by their chemical names. Kaolins, for example, are hydrous alumino silicates, while feldspar is an anhydrous alkalialumino silicate. Bentonite is usually an aluminum silicate clay and talc is hydrated magnesium silicate. Glass, or fillers based on silicon dioxide may be natural or synthetic silicas. Wollastonite is a calcium metasilicate whereas mica is a potassium alumino silicate. Clays may be employed as a primary filler; the two most common of which are kaolin and bentonite. Kaolin refers generally to minerals including kaolinite which is a hydrated aluminum silicate ($\text{Al}_2\text{O}_3 \cdot 2\text{SiO}_2 \cdot 2\text{H}_2\text{O}$) and is the major clay mineral component in the rock kaolin. Kaolin is also a group name for the minerals kaolinite, macrite, dickite and halloysite. Bentonite refers to hydrated sodium, calcium, iron, magnesium, and aluminum silicates known as montmorillonites which are also sometimes referred to as smectites .

15

20

A large number of siliceous materials may also be employed as a primary filler. These materials include diatomite, perlite, pumice, pyrophyllite, silica, and talc. These minerals typically consist of an alkali metal oxide or alkaline earth element oxide, and silicon dioxide together with a minor amount of water and other elements. Talc, for example, includes from about 25% to about 35% MgO , 35-60% SiO_2 and about 5% H_2O .

25

Diatomite or kieselguhr is a sedimentary material formed by centuries of life cycles of aquatic diatoms, a simple plant in the algae family with an opaline silica cell wall. Thousands of species of diatoms have flourished and continue to do so in both marine and lacustrine environments. Fossilized skeletal remains of diatoms in commercial quantities are found in many parts of the world. Perlite is believed to result from hydration of volcanic glass or obsidian. Generally, hydration is about 2-5%; this water content is important to the expansibility of the perlite, influencing melting point and supplying expansion steam.

The rapid expansion of dissolved gases in silica lavas during volcanic eruptions produces the light density pumice or pumicite. The finer pumicite particles are transported by wind away from the source volcano, whereas pumice accumulates closer to the vent.

The hydrous aluminum silicate, pyrophyllite, is formed by hydrothermal metamorphism of acid tuffs or braccias.

Silica sand is frequently obtained from the weathering of quartz-containing rock. Decomposition and disintegration of the rock with decomposition of other minerals leaves a primary quartz sand that has been concentrated by water movement. Induration of sands to sandstone results in another source for silica sand. Amorphous silica, or more properly cryptocrystalline or microcrystalline silica, is formed by the slow leaching of siliceous limestone or calcareous chert.

Talc is formed by the metamorphic (hydrothermal) alteration of magnesium silicates such as serpentine, pyroxene or dolomite.

The siliceous fillers are generally inert in most applications as shown by pH values in the range from about 6-10.

Sulfate minerals, such as gypsum and barite may likewise be employed as a primary filler. Gypsum is the name given to the mineral that consists of hydrous calcium sulfate ($\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$), and also to the sedimentary rock that consist primarily of this mineral. In its pure state, gypsum contains 32.6% lime (CaO), 46.5% sulfur trioxide (SO_3), and 20.9% water. Single crystals and rock masses that approach this theoretical purity are generally colorless to white, but in practice, the presence of impurities such as clay, dolomite, silica and iron imparts a gray brown, red or pink color to the rock.

There are three common varieties of gypsum: selenite, which occurs as transparent or translucent crystals or plates; satin spar, which occurs as thin veins (typically white) of fibrous gypsum crystals; and alabaster, which is compact, fine-grained gypsum that has a smooth, even-textured appearance. Most deposits or rock gypsum that are suitable for industrial purposes are aggregates of fine to coarse gypsum crystals that have intergrown to produce a thick, massive sedimentary rock unit that is 90-98% gypsum. Alabaster is highly prized because of its uniformly fine particle size, but the more common deposits of rock gypsum consisting of coarser-grained selenite can generally be crushed and ground to produce a suitable filler and coating material.

Gypsum has a hardness of 2 on the Mohs scale, and can be scratched with the fingernail. Large rock masses are easily crushed and ground to a fine powder. The specific gravity of gypsum is about 2.31 and the refractive index is about 1.53.

Gypsum is slightly soluble in water but it is an inert substance that resists chemical change. The oil-absorption capacity of gypsum is fairly low ($0.17 - 0.25 \text{ cm}^3 \text{ g}^{-1}$).

Raw or crude gypsum is one of the forms used as fillers and coatings, but for some purposes calcined or deadburned gypsum is desired. In calcining, the gypsum

is heated to about 120-160°C to drive off free water and partially remove the water of crystallization. The calcined material or stucco, has a chemical composition of $\text{CaSO}_4 \cdot \frac{1}{2}\text{H}_2\text{O}$, and it readily takes up water. Calcination at higher temperatures (500-725°C) results in a product called deadburned gypsum, which has a composition of CaSO_4 .

Anhydrite, a sulfate mineral and rock that is closely associated with gypsum in nature and has minor uses as a filler, is anhydrous calcium sulfate (CaSO_4) containing 41.2% CaO and 58.8% SO_3 . It is typically fine grained (like alabaster), and occurs in thick, massive sedimentary rock units. Anhydrite usually is white or bluish gray when pure, but it may be discolored by impurities. Anhydrite has a hardness of 3.5, a specific gravity of 2.98, and a refractive index of 1.57-1.61.

Thus, fillers commonly include:

15	Barium Salt
	Barium Ferrite
	Barium Sulfate
	Carbon/Coke Power
	Calcium Fluoride
20	Calcium Sulfate
	Carbon Black
	Calcium Carbonate
	Ceramic Powder
	Chopped Glass
25	Clay
	Continuous Glass
	Glass Bead
	Glass Fiber
	Glass Fabric

	Glass Flake
	Glass Mat
	Graphite Powder
	Glass Sphere
5	Glass Tape
	Milled Glass
	Mica
	Molybdenum Disulfide
	Silica
10	Short Glass
	Talc
	Whisker
	Particulate fillers, besides mica, commonly include:
15	Glass
	Calcium carbonate
	Alumina
	Beryllium oxide
	Magnesium carbonate
20	Titanium dioxide
	Zinc oxide
	Zirconia
	Hydrated alumina
	Antimony oxide
25	Silica
	Silicates
	Barium ferrite
	Barium sulphate
	Molybdenum disulphide

Whiskers

Glass

Mineral wool

Calcium sulphate

Potassium titanate

Boron

Alumina

Sodium aluminum

Hydroxy carbonate

This invention may be embodied in other forms or carried out in other ways without departing from the spirit or essential characteristics thereof. The present

embodiment is therefore to be considered as in all respects illustrative and not restrictive, the scope of the invention being indicated by the appended claims, and all changes which come within the meaning and range of equivalency are intended to be embraced therein.

100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

WHAT IS CLAIMED IS:

1. An injection blow-molded disposable tumbler exhibiting biaxial toughness formed from a polymeric material comprising:
 - (a) a base forming the bottom of said tumbler defining an outer edge thereof;
 - (b) a sidewall integrally formed with said base extending upwardly from the outer edge thereof defining about its upper extremity a fortified rim; and
 - (c) wherein said fortified rim has a thickness greater than the adjacent portion of said sidewall.
2. An injection blow-molded disposable tumbler exhibiting biaxial toughness formed from a polymeric material comprising:
 - (a) a base forming the bottom of said tumbler defining an outer edge thereof;
 - (b) a sidewall integrally formed with said base extending upwardly from the outer edge thereof having a thickness of from about 5 to about 50 mils defining about its upper extremity a fortified rim;
 - (b) said sidewall extending upwardly with a taper of from about 1.0 to about 4.5 degrees;

wherein said fortified rim has a thickness of at least 2 mils greater than the adjacent portion of said sidewall over a height of at least 2 mils.

3. The tumbler according to Claim 2, wherein said sidewall extends upwardly with a taper of from about 2.75 to about 4 degrees.
4. The tumbler according to Claim 3, wherein said sidewall extends upwardly with a taper of about 3 degrees.
5. The tumbler according to Claim 2, wherein said fortified rim has a thickness and a height of from about 1.5 to about 6 times the thickness of the adjacent portion of the sidewall.
6. The tumbler according to Claim 2, wherein said fortified rim has a thickness and height of from about 3 to about 5 times the thickness of the adjacent portion of said sidewall.
7. The tumbler according to Claim 2, wherein said polymer is a thermoplastic optically clear polymer with a haze value of less than 10.
8. The tumbler according to Claim 7, wherein said optically clear polymer is selected from the group consisting of polystyrene, clarified polypropylene, polyesters, polycarbonates, polyacrylates and styrene acrylonitrile.
9. The tumbler, according to Claim 2, wherein said polymer is polystyrene.
10. An injection blow-molded disposable tumbler formed from a polymeric material comprising:
 - (a) a base forming the bottom of said tumbler defining an outer edge thereof;

(b) a sidewall integrally formed with said base extending upwardly from the outer edge thereof having a thickness of from about 5 to about 50 mils defining about its upper extremity a fortified rim;

(c) said sidewall exhibiting biaxial toughness, the volume of said injection molded tumbler being from about 1.5 to about 4 times the volume of an injection molded parison from which it was prepared;

wherein said fortified rim has a thickness of at least 2 mils greater than the adjacent portion of said sidewall over a height of at least 2 mils; and wherein said tumbler has a taper from about 1.0 to about 4.5 degrees.

11. The tumbler according to Claim 10, wherein the volume of said tumbler is from about 1.75 to about 3 times the volume of the injection molded parison from which it was prepared.
12. The tumbler according to Claim 11, wherein the volume of the tumbler is about twice the volume of the injection molded parison from which it was prepared.
13. The tumbler according to Claim 10, wherein said sidewall has a thickness of from about 10 to about 35 mils.
14. The tumbler according to Claim 13, wherein the sidewall has a thickness of from about 15 to about 25 mils.
15. The tumbler according to Claim 14, wherein the sidewall has a thickness of about 20 mils.

16. An injection blow-molded tumbler formed of an optically clear polymer comprising;
- (a) a substantially circular base portion with an outer edge;
 - (b) a substantially cylindrical base portion with an outer edge;
 - (c) a substantially cylindrical sidewall extending upwardly from the outer edge of the base portion having a thickness of from about 5 to about 50 mils defining about its upper extremity a fortified rim;
- said sidewall extending upwardly with an angular taper with its central axis of from about 1.0 to about 4.5 degrees;
- said fortified rim having a thickness of at least 2 mils greater than an adjacent portion of said sidewall;
- said sidewall further including a pattern which alters the cylindrical character thereof over at least a portion of said sidewall which pattern is operative as a grip portion for a user.
17. The tumbler according to Claim 16, wherein a ratio of the height of the tumbler to the inside diameter of the upper portion of the sidewall is from about 2 to about 4.
18. The tumbler according to Claim 17, wherein said ratio is about 3.
19. The tumbler according to Claim 16, wherein said tumbler has contained volume of from about 12 to about 15 ounces.

20. The tumbler according to Claim 16, wherein said tumbler defines an inner volume of about 14 ounces.

21. The tumbler according to Claim 16, wherein said tumbler has a height of from about 5.75 to about 6 inches.

22. An injection blow-molded disposable tumbler exhibiting biaxial toughness formed of a polymeric material comprising:

(a) a base forming the bottom of said tumbler defining an outer edge thereof;

(b) a sidewall integrally formed with said base extending upwardly from the outer edge thereof having a thickness of from about 5 to about 50 mils defining about its upper extremity a fortified rim;

said sidewall extending upwardly with a taper of from about 2.5 to about 10 degrees;

wherein said fortified rim has a thickness of at least 2 mils greater than the adjacent portion of said sidewall over a height of at least 2 mils.

23. The tumbler according to Claim 22, wherein said sidewall extends upwardly with a taper of from about 4.5 to about 10 degrees.

24. The tumbler according to Claim 23, wherein said sidewall extends upwardly with a taper of from about 4.5 to about 7.5 degrees.

25. The tumbler according to Claim 22, wherein said fortified rim has a thickness and a height of from about 1.5 to about 6 times the thickness of the adjacent portion of the sidewall.
26. The tumbler according to Claim 22, wherein said fortified rim has a thickness and height of from about 3 to about 5 times the thickness of the adjacent portion of said sidewall.
27. The tumbler according to Claim 22, wherein said tumbler is formed of optically clear polymer with a haze value of less than 10.
28. The tumbler according to Claim 22, wherein said optically clear polymer is selected from the group consisting of polystyrene, clarified polypropylene, polyesters, polycarbonates, polyacrylates and styrene acrylonitrile.
29. The tumbler, according to Claim 22, wherein said polymer is polystyrene.
30. An injection blow-molded disposable tumbler formed of an optically clear polymer comprising:
- (a) a base forming the bottom of said tumbler defining an outer edge thereof;
 - (b) a sidewall integrally formed with said base extending upwardly from the outer edge thereof having a thickness of from about 5 to about 50 mils defining about its upper extremity a fortified rim;

said sidewall exhibiting biaxial toughness, the volume of said injection molded tumbler being from about 1.5 to about 4 times the volume of an injection molded parison from which it was prepared;

wherein said fortified rim has a thickness of at least 2 mils greater than the adjacent portion of said sidewall over a height of at least 2 mils; and

wherein said tumbler has a taper from about 2.5 to about 10 degrees.

31. The tumbler according to Claim 30 wherein the volume of said tumbler is from about 1.75 to about 3 times the volume of the injection molded parison from which it was prepared.
32. The tumbler according to Claim 31 wherein the volume of the tumbler is about twice the volume of the injection molded parison from which it was prepared.
33. The tumbler according to Claim 30 wherein said sidewall has a thickness of from about 10 to about 35 mils.
34. The tumbler according to Claim 33 wherein the sidewall has a thickness of from about 15 to about 25 mils.
35. The tumbler according to Claim 34 wherein the sidewall has a thickness of about 20 mils.
36. An injection blow-molded tumbler formed of an optically clear polymer comprising:
 - (a) a substantially circular base portion with an outer edge;
 - (b) a substantially cylindrical sidewall extending upwardly from the outer edge of the base portion having a thickness of from about 5 to about 50 mils defining about its upper extremity a fortified rim;

said sidewall extending upwardly with an angular taper with its central axis of from about 4.5 to about 10 degrees;

said fortified rim having a thickness of at least 2 mils greater than an adjacent portion of said sidewall;

said sidewall further including a pattern which alters the cylindrical character thereof over at least a portion of said sidewall which pattern is operative as a grip portion for a user.

37. The tumbler according to Claim 36 wherein a ratio of the height of the tumbler to the inside diameter of the upper portion of the sidewall is from about 1 to about 5.
38. The tumbler according to Claim 37 wherein said ratio is from about 1.3 to about 1.7.
39. The tumbler according to Claim 35 wherein the height of said tumbler is from about 4.6 to about 4.8 inches.
40. The tumbler according to Claim 35 wherein the volume defined by said tumbler is from about 12 to about 16 ounces.
41. The tumbler according to Claim 35 wherein the volume defined by said tumbler is about 15 fluid ounces.
42. An injection blow-molded disposable tumbler exhibiting biaxial toughness formed of a polymeric material comprising;
 - (a) a base forming the bottom of said tumbler defining an outer edge thereof;

- (b) a sidewall integrally formed with said base extending upwardly from the outer edge thereof having a thickness of from about 5 to about 50 mils defining about its upper extremity a fortified rim;

said sidewall extending upwardly with a taper of from about 1 to about 10 degrees;

wherein said fortified rim has a thickness of at least 2 mils greater than the adjacent portion of said sidewall over a height of at least 2 mils, said tumbler defining a volume of at least about 16 fluid ounces.

- 43. The tumbler according to Claim 42, wherein said sidewall extends upwardly with a taper of from about 2.75 to about 9 degrees.
- 44. The tumbler according to Claim 43, wherein said sidewall extends upwardly with a taper of from about 5 to about 7 degrees.
- 45. The tumbler according to Claim 42, wherein said fortified rim has thickness and a height of from about 1.5 to about 6 times the thickness of the adjacent portion of the sidewall.
- 46. The tumbler according to Claim 42, wherein said fortified rim has a thickness and height of from about 3 to about 5 times the thickness of the adjacent portion of said sidewall.
- 47. The tumbler according to Claim 42, wherein said polymeric material is an optically clear polymer with a haze value of less than 10.

48. The tumbler according to Claim 42, wherein said optically clear polymer is selected from the group consisting of polystyrene, clarified polypropylene, polyesters, polycarbonates, polyacrylates and styrene acrylonitrile.

49. The tumbler, according to Claim 42, wherein said polymer is polystyrene.

50. An injection blow-molded disposable tumbler of an optically clear polymer comprising:

(a) a base forming the bottom of said tumbler defining an outer edge thereof;

(b) a sidewall integrally formed with said base extending upwardly from the outer edge thereof having a thickness of from about 5 to about 50 mils defining about its upper extremity a fortified rim;

said sidewall exhibiting biaxial toughness, the volume of said injection molded tumbler being from about 1.5 to about 4 times the volume of an injection molded parison from which it was prepared and said tumbler defining a volume of from about 16-20 fluid ounces;

wherein said fortified rim has a thickness of at least 2 mils greater than the adjacent portion of said sidewall over a height of at least 2 mils; and

wherein said tumbler has a taper from about 2.5 to about 10 degrees.

51. A method of forming a durable polycarbonate permaware container comprising:

- (a) injecting molten polycarbonate into a mold cavity formed by a mold wall and a core to form a polycarbonate parison on the core;
 - (b) separating the parison from the mold wall by moving the parison on the core axially in a straight path away from the mold wall;
 - (c) moving the parison on the core in a substantially arcuate path into axial alignment with a blow mold which is in a side-by-side relationship with the mold cavity;
 - (d) moving the parison on the core axially in a straight path into the blow mold;
- and
- (f) expanding the parison on the core in the blow mold at a uniform temperature to form a hollow container having a sidewall integrally formed to a base and a fortified rim, the sidewall having a uniform thickness of from about greater than 50 mils to about 500 mils.

52. The method of Claim 51, wherein the sidewall has a uniform thickness of from about 75 mils to about 375 mils.

53. The method of Claim 51, wherein the polycarbonate is injected into the mold cavity at a temperature of from about 450°F to about 700°F.

54. The method of Claim 53, wherein the polycarbonate is injected into the mold cavity at a temperature of from about 500°F to about 650°F.
55. The method of Claim 51, wherein the molten polycarbonate is injected into the mold cavity at a pressure of about 1,000 to 3,000 psi.
56. The method of Claim 55, wherein the molten polycarbonate is injected into the mold cavity at an injection pressure of about 2,100 psi.
57. The method of Claim 51, wherein the parison is expanded at a uniform temperature of from about 250°F to about 500°F.
58. The method of Claim 57, wherein the parison is expanded at a pressure of from about 100 to about 500 psi.
59. The method of Claim 51, wherein the polycarbonate comprises aromatic homopolycarbonate or aromatic copolycarbonate resins.
60. The method of Claim 51, wherein the polycarbonate has a melt flow rate of from about 10 to 22 g/10 min.
61. An injection blow-molded polycarbonate permaware hollow container comprising:
- (a) a base forming the bottom of said container defining an outer edge thereof;

(b) a sidewall integrally formed with said base extending upwardly from the outer edge thereof and having a thickness of from about over 50 to about 500 mils to a fortified rim about its upper extremity.

62. The permaware polycarbonate container of Claim 61, wherein the fortified rim has a thickness of at least 2 mils greater than an adjacent portion of the sidewall over a height of at least 2 mils.
63. The permaware polycarbonate container of Claim 61, wherein both width and height of the fortified rim are from about 1.1 to about 4 times a thickness of an adjacent sidewall.
64. The permaware polycarbonate container of Claim 63, wherein both the width and the height of the fortified rim are about 100 mils and the adjacent sidewall is about 80 mils.
65. The permaware polycarbonate container of Claim 61, wherein the base is from about 1.1 to about 8 times the thickness of the sidewall.
66. The permaware polycarbonate container of Claim 61, wherein the polycarbonate comprises aromatic homopolycarbonate or aromatic copolycarbonate resins.
67. The permaware polycarbonate container of Claim 66, wherein the polycarbonate has a melt flow rate of 10 to 22 g/10 min.
68. The permaware polycarbonate container of Claim 61, wherein the bottom of said base has integrally molded thereto indicia or a configuration different from the remaining base.

69. A method of forming a container having a wall thickness greater than 50 mils, said container containing sidewalls and an integrally formed base, comprising:
- (a) blowing a parison in a blow mold shaped in the form of said container,
 - (b) inserting within said blown container a core which presses the base of said container against a mold face having thereon indicia or other structural configurations so as to mold said indicia or other mold configurations onto the outside surface of said base.
70. The process of Claim 69, wherein said parison is formed from a polycarbonate plastic and said parison is blown by directing fluid pressure initially at the top of the parison and directing the fluid pressure from said top toward said base of said parison.
71. A method of forming a container comprising:
- (a) injecting molten resin into a mold cavity formed by a mold wall and a core to form a resinous parison on the core;
 - (b) separating the parison from the mold wall by moving the parison on the core axially in a straight path away from the mold wall;
 - (c) moving the parison on the core in a substantially arcuate path into axial alignment with a blow mold which is in a side-by-side relationship with the mold cavity;
 - (d) moving the parison on the core axially in a straight path into the blow mold; and

(e) expanding the parison on the core in the blow mold at a uniform temperature to form a hollow container said resin selected from the group consisting of filled polystyrene, filled and non-filled polycarbonate, polyethylene terephthalate, polycarbonate and ABS mixtures, acrylic resins, clarified polypropylene and polyvinylchloride.

72. The method of Claim 71, wherein the filled resins contain up to 5 wt.% of nanometer-sized particles.

73. The method of Claim 72, wherein said nanometer-sized particles comprise a clay.

74. A transparent drinking tumbler comprised of polystyrene filled with nanometer-sized particles having a size within the range of visible-light wavelengths.

75. A method of forming a container having a wall thickness greater than 50 mils, said container containing sidewalls and an integrally-formed base, comprising:

blowing a parison in a blow mold shaped in the form of said container to form a hollow container,

inserting within said hollow container which remains in said blow mold a core which presses the base of said container against a mold face having thereon indicia or other structural configurations so as to mold said indicia or other mold configurations onto the outside surface of said base.

76. A method of forming a container comprising:

(a) injecting molten resin into a mold cavity formed by a mold wall and a core to form a resinous parison on the core;

- (b) separating the parison from the mold wall by moving the parison on the core axially in a straight path away from the mold wall;
- (c) moving the parison on the core in a substantially arcuate path into axial alignment with a blow mold which is in a side-by-side relationship with the mold cavity;
- (d) moving the parison on the core axially in a straight path into the blow mold; and
- (e) expanding the parison on the core in the blow mold by directing fluid initially at the top of the parison and directing the fluid pressure from said top toward the base of said parison at a uniform temperature to form a hollow container;

said resin selected from the group consisting of polycarbonate, polyethylene terephthalate, polycarbonate and ABS mixtures, acrylic resins, clarified polypropylene and polyvinylchloride.

77. An injection blow-molded disposable tumbler exhibiting biaxial toughness formed from a polymeric material including a copolymer of styrene and butadiene comprising:

- (a) a base forming the bottom of said tumbler defining an outer edge thereof;
- (b) a sidewall integrally formed with said base extending upwardly from the outer edge thereof defining about its upper extremity a fortified rim; and
- (c) wherein said fortified rim has a thickness greater than the adjacent portion of said sidewall.

78. The injection blow-molded tumbler according to Claim 77, wherein the amount of butadiene residue in said copolymer is from about 2 to about 40 percent by weight.
79. The injection blow-molded tumbler according to Claim 77, wherein the amount of butadiene residue in said copolymer is from about 15 to about 30 percent by weight.
80. The injection blow-molded tumbler according to Claim 77, wherein said tumbler consists essentially of styrene-butadiene copolymer blended with polystyrene.
81. The injection blow-molded tumbler according to Claim 77, wherein said polymeric material consists of a blend of polystyrene with a copolymer of styrene and butadiene.
82. An injection blow-molded disposable tumbler exhibiting biaxial toughness formed from a polymeric material including an impact modifier comprising:
- (a) a base forming the bottom of said tumbler defining an outer edge thereof;
 - (b) a sidewall integrally formed with said base extending upwardly from the outer edge thereof defining about its upper extremity a fortified rim; and
 - (d) wherein said fortified rim has a thickness greater than the adjacent portion of said sidewall, and said impact modifier is selected from the group consisting of core shell polymers, olefin containing copolymers, rubber polymers and copolymers, styrene containing copolymers, and mixtures thereof.

83. An injection blow-molded disposable tumbler exhibiting biaxial toughness formed from a polymeric material including a mineral filler comprising:
- (a) a base forming the bottom of said tumbler defining an outer edge thereof;
 - (b) a sidewall integrally formed with said base extending upwardly from the outer edge thereof defining about its upper extremity a fortified rim; and
 - (c) wherein said fortified rim has a thickness greater than the adjacent portion of said sidewall, and wherein said mineral filler is present in an amount of from about 5 to about 50 wt.%.
84. The injection blow-molded tumbler according to Claim 83, wherein said mineral filler is present in an amount of from about 8 to about 20 wt.%.
85. The injection blow-molded tumbler according to Claim 84, wherein said mineral filler is present in an amount of from about 10 to about 15 wt.%.

ABSTRACT

An injection blow-molded disposable tumbler is formed from a polymeric material and includes a fortified upper rim having a thickness greater than the adjacent sidewall. The tumbler may be formed of a variety of resinous materials and exhibits improved toughness and crush resistance as well as aesthetic qualities particularly desired by consumers.

FIG. 1A

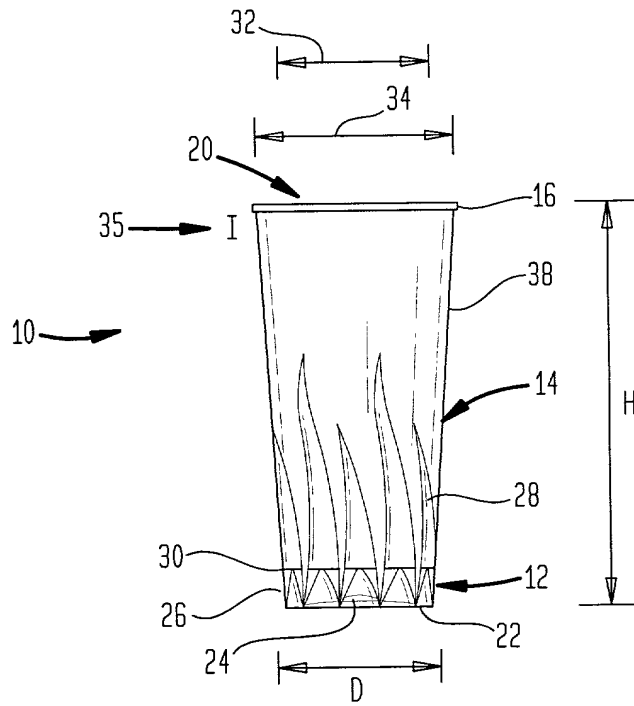


FIG. 1C

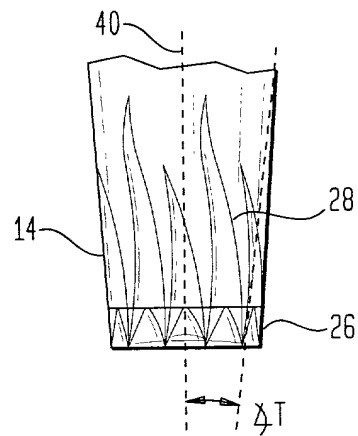


FIG. 1B

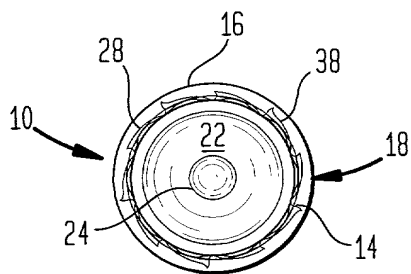


FIG. 2A

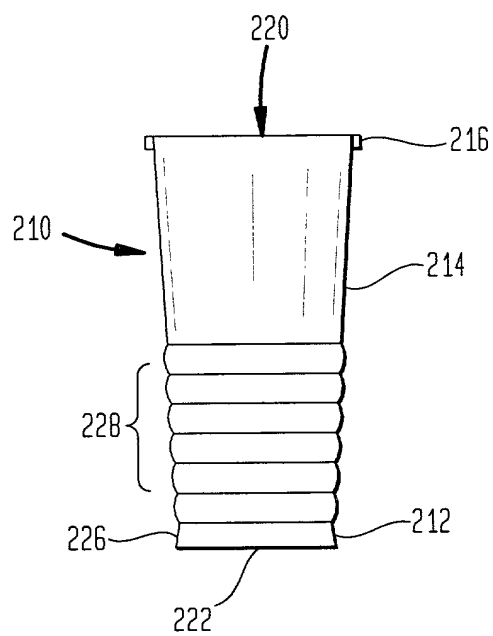


FIG. 2B

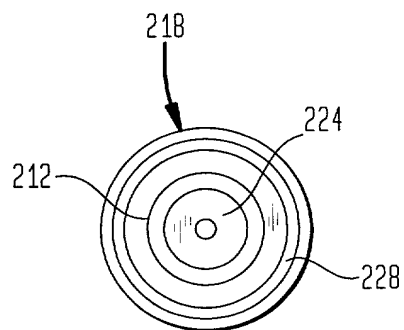


FIG. 3A

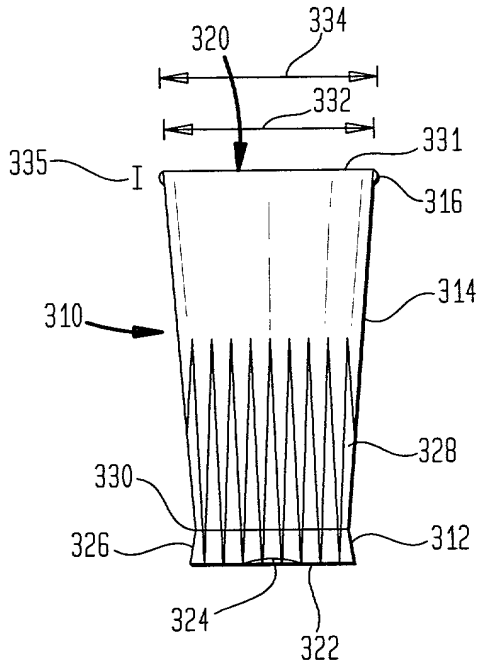


FIG. 3B

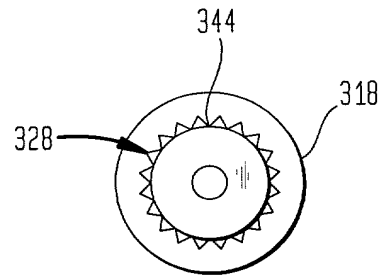


FIG. 3C

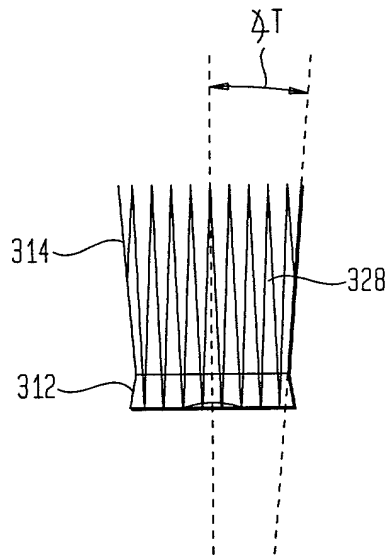


FIG. 3D




FIG. 4A

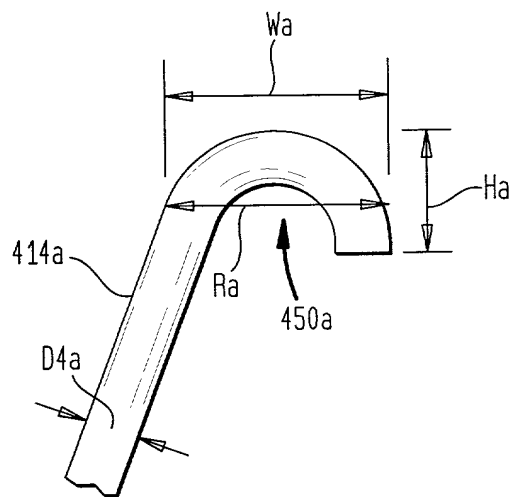


FIG. 4B

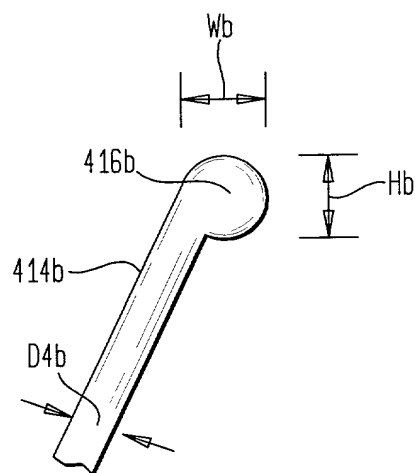


FIG. 5

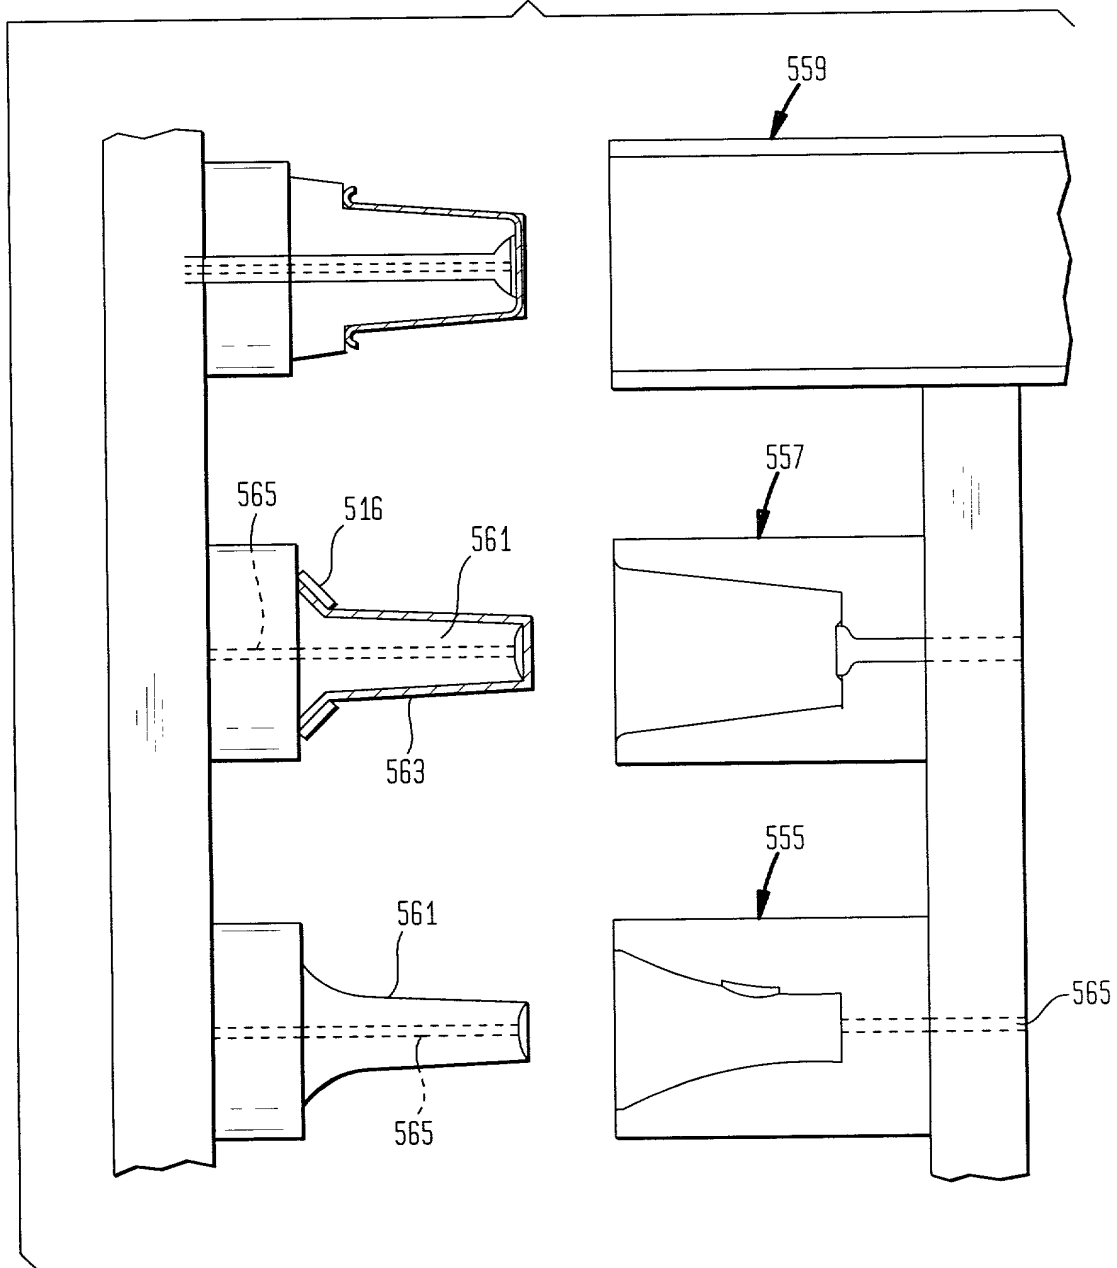


FIG. 6A

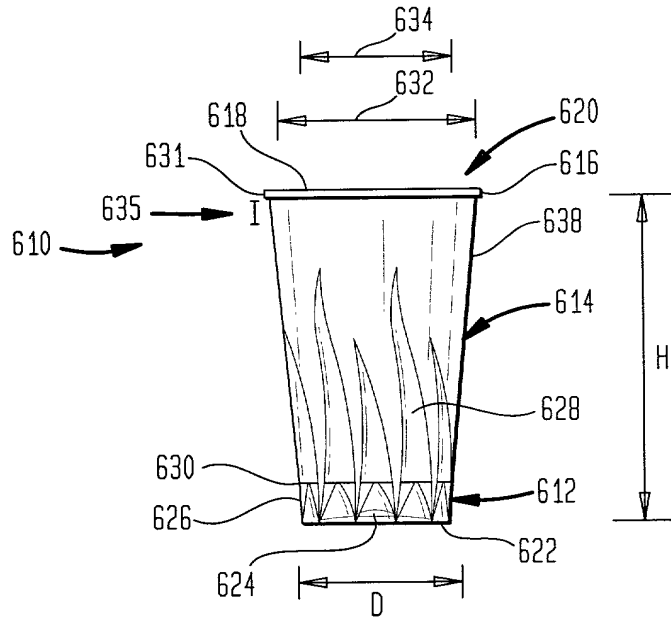


FIG. 6B

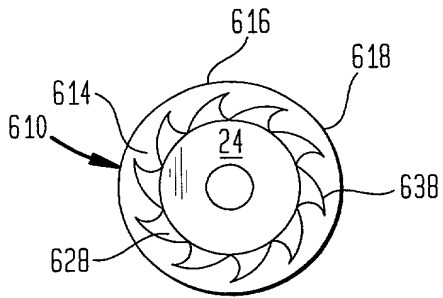


FIG. 6C

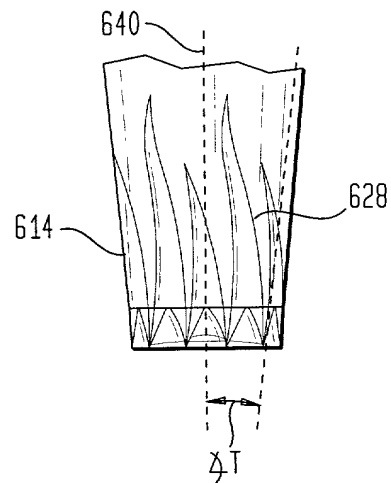


FIG. 7A

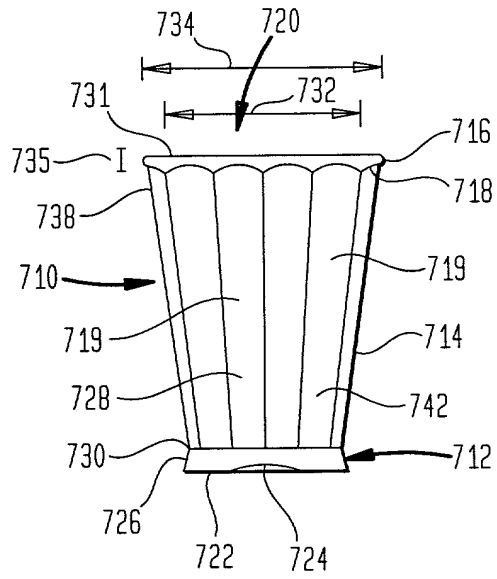


FIG. 7B

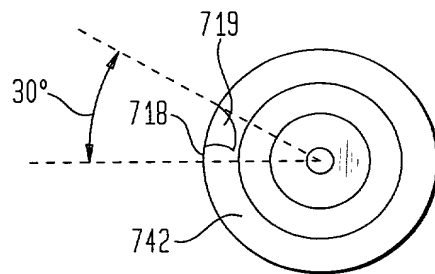


FIG. 8

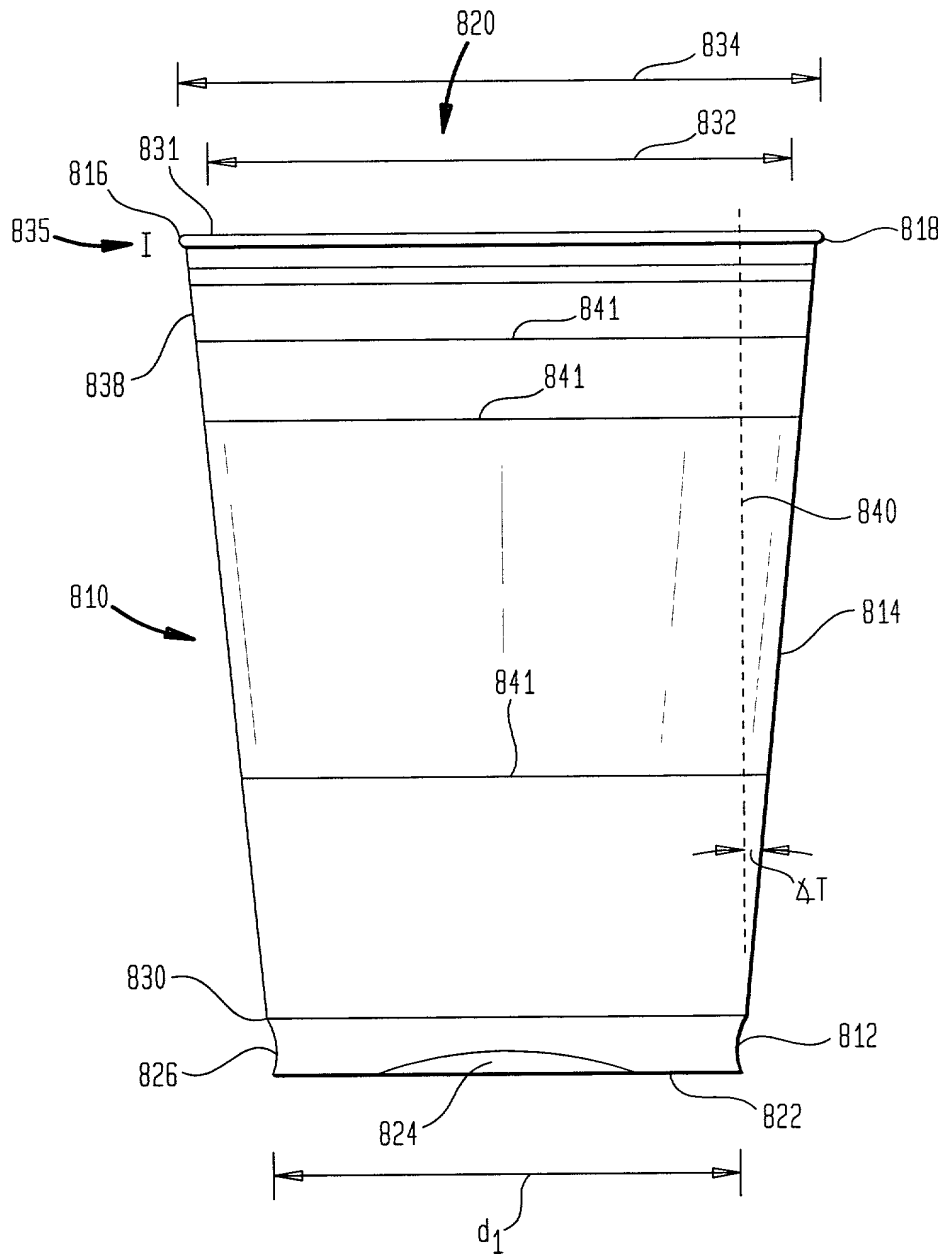


FIG. 9

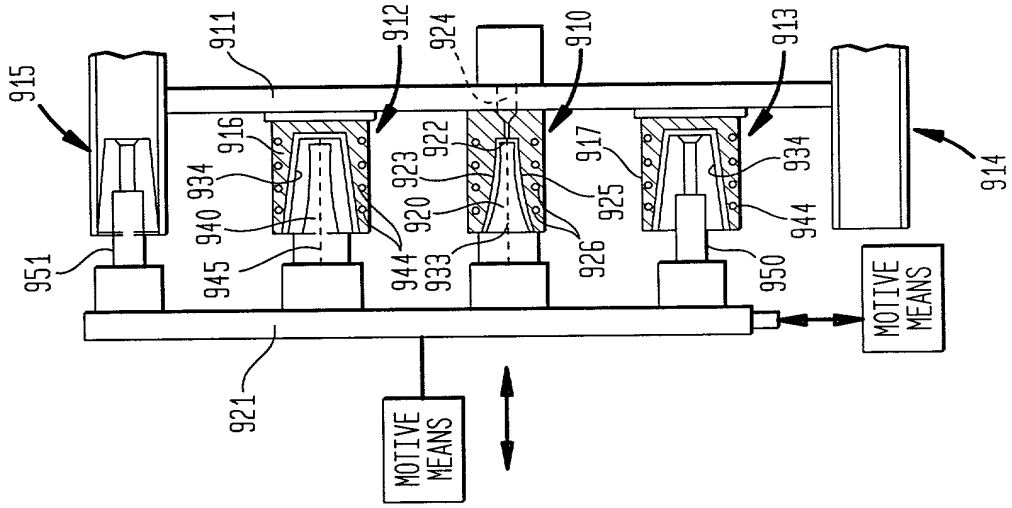


FIG. 10

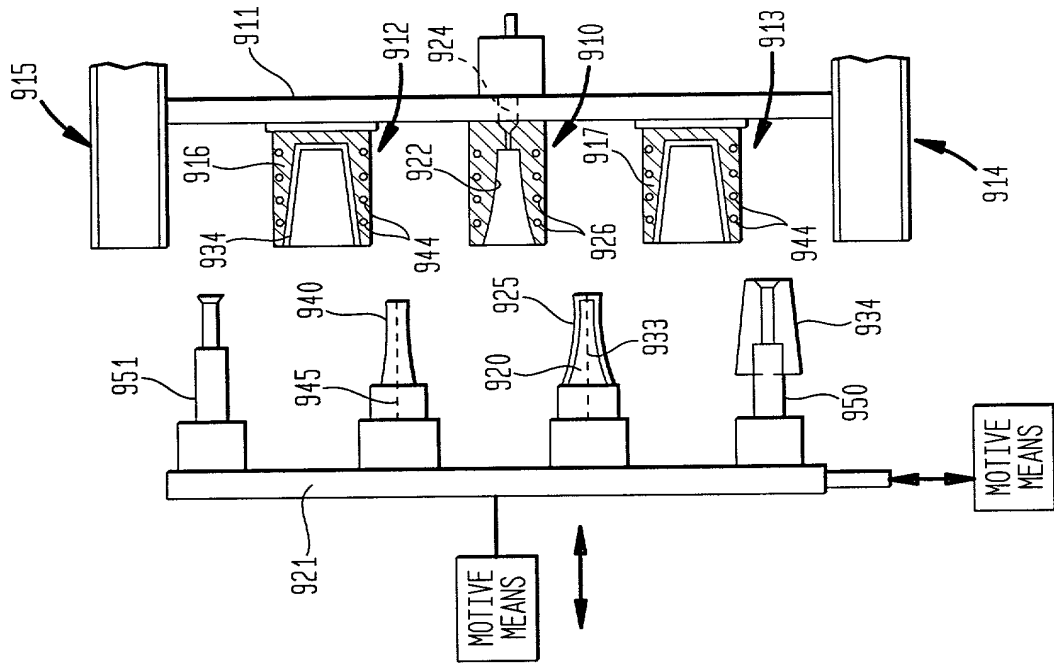


FIG. 11

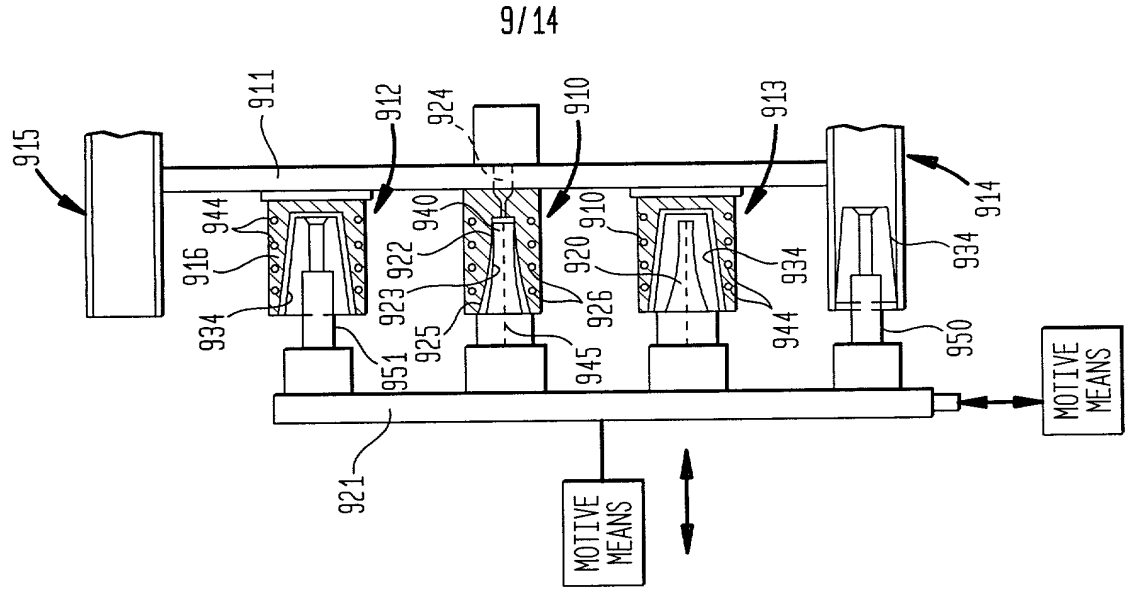


FIG. 12

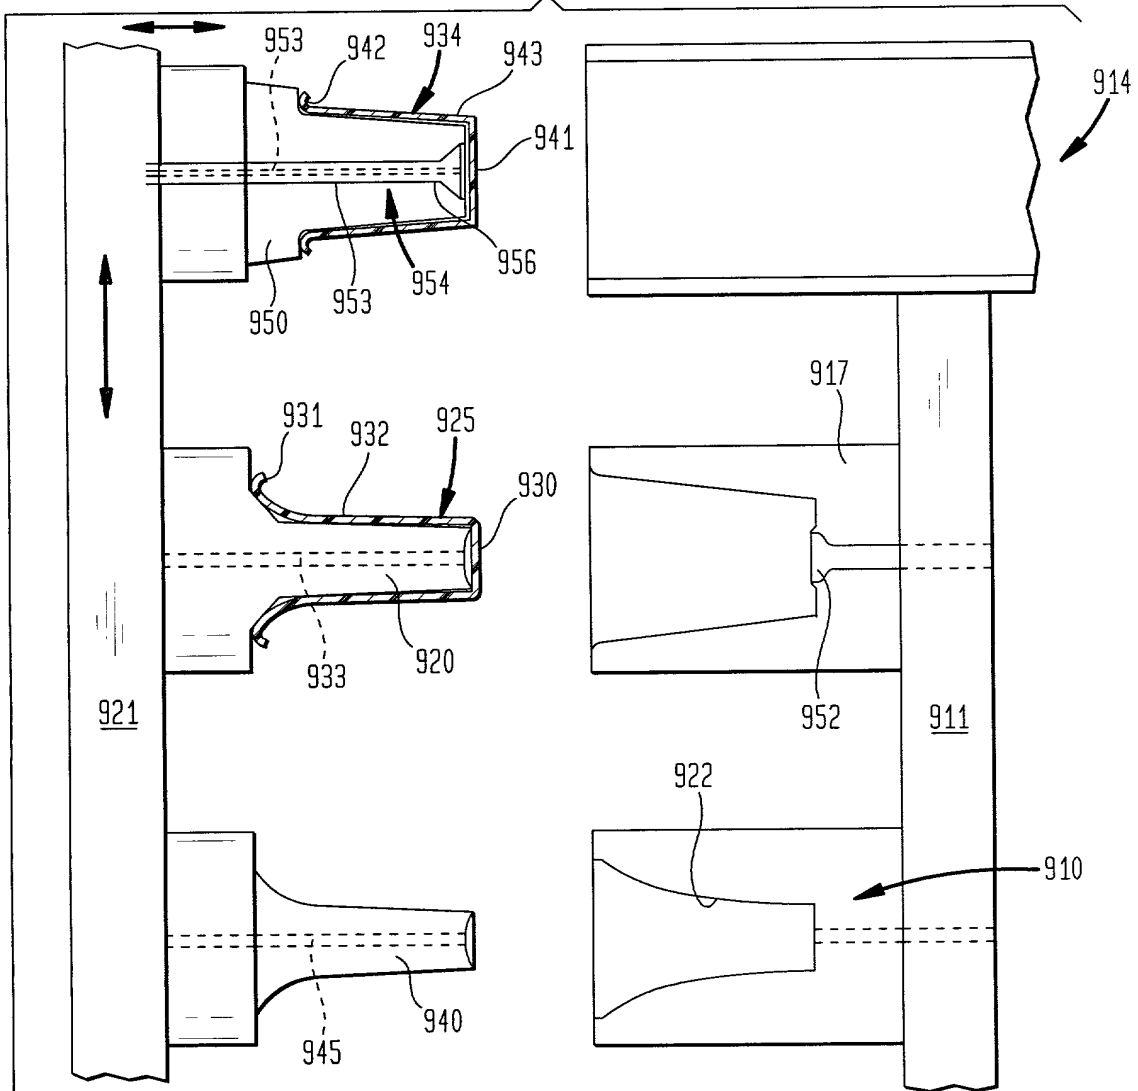


FIG. 13

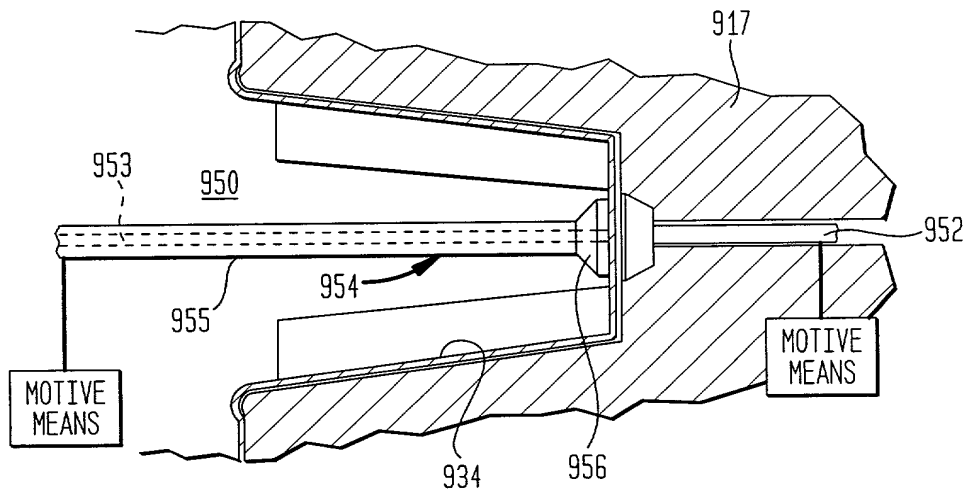


FIG. 14

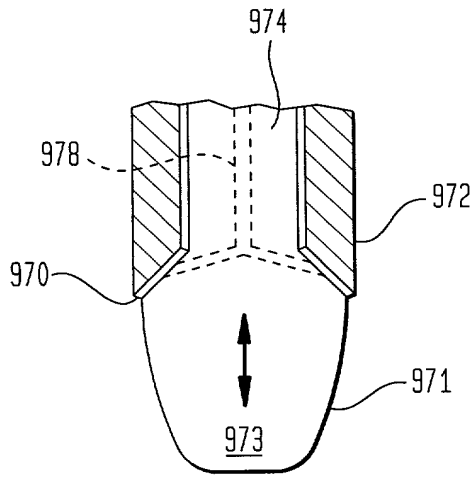


FIG. 15

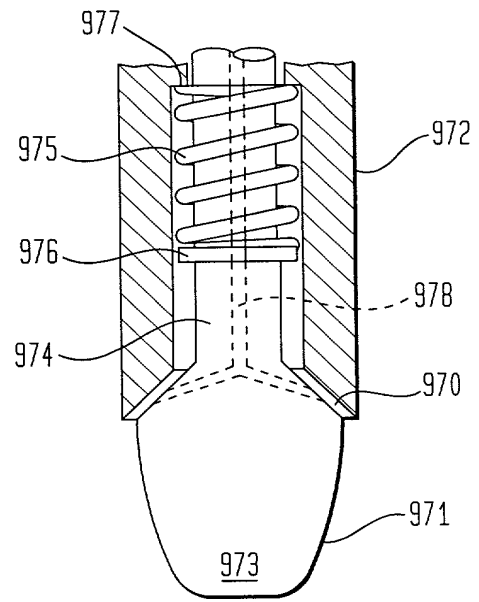


FIG. 16

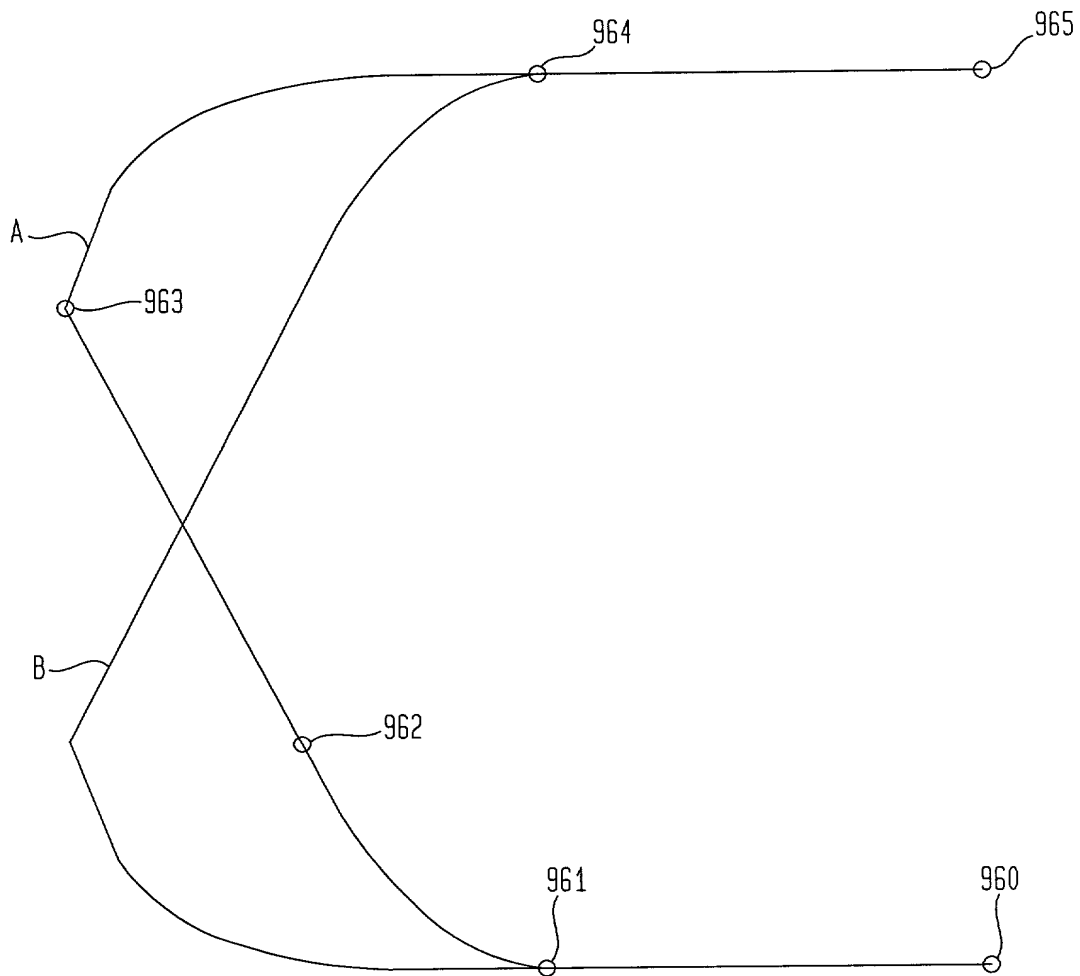


FIG. 17A

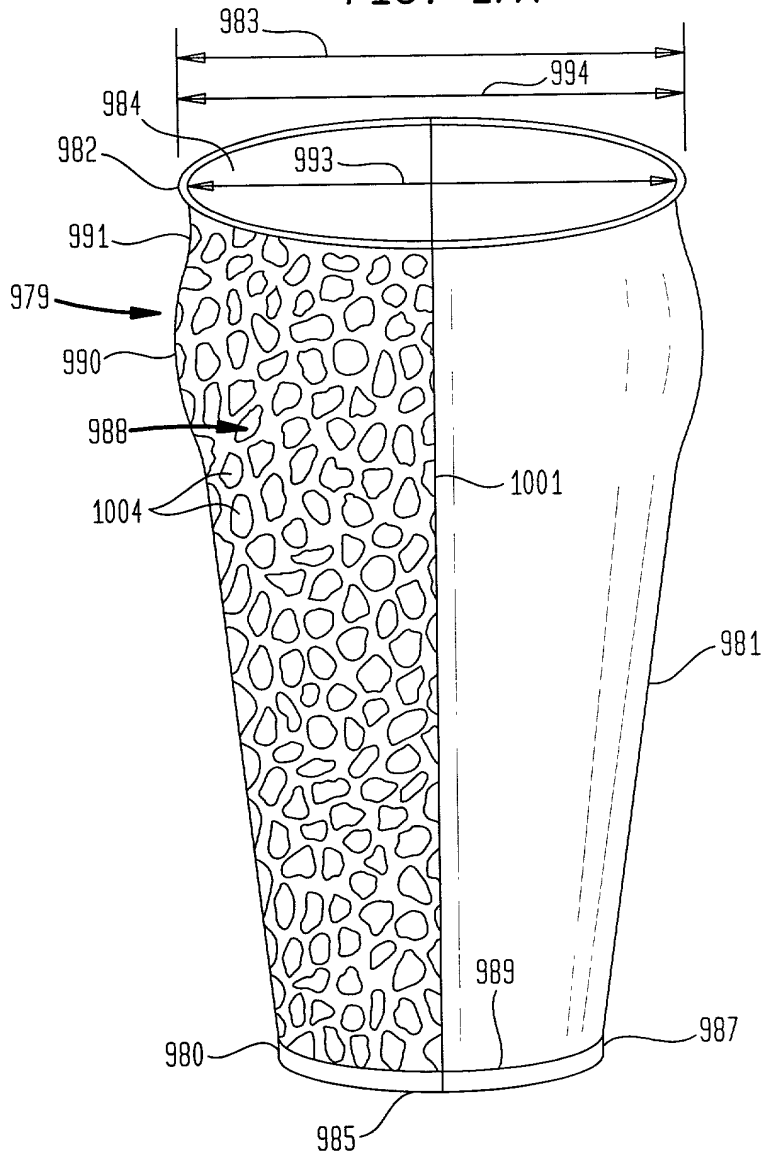


FIG. 17B

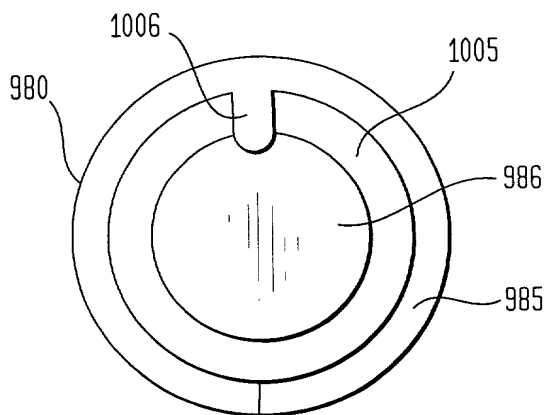


FIG. 17C





FIG. 18

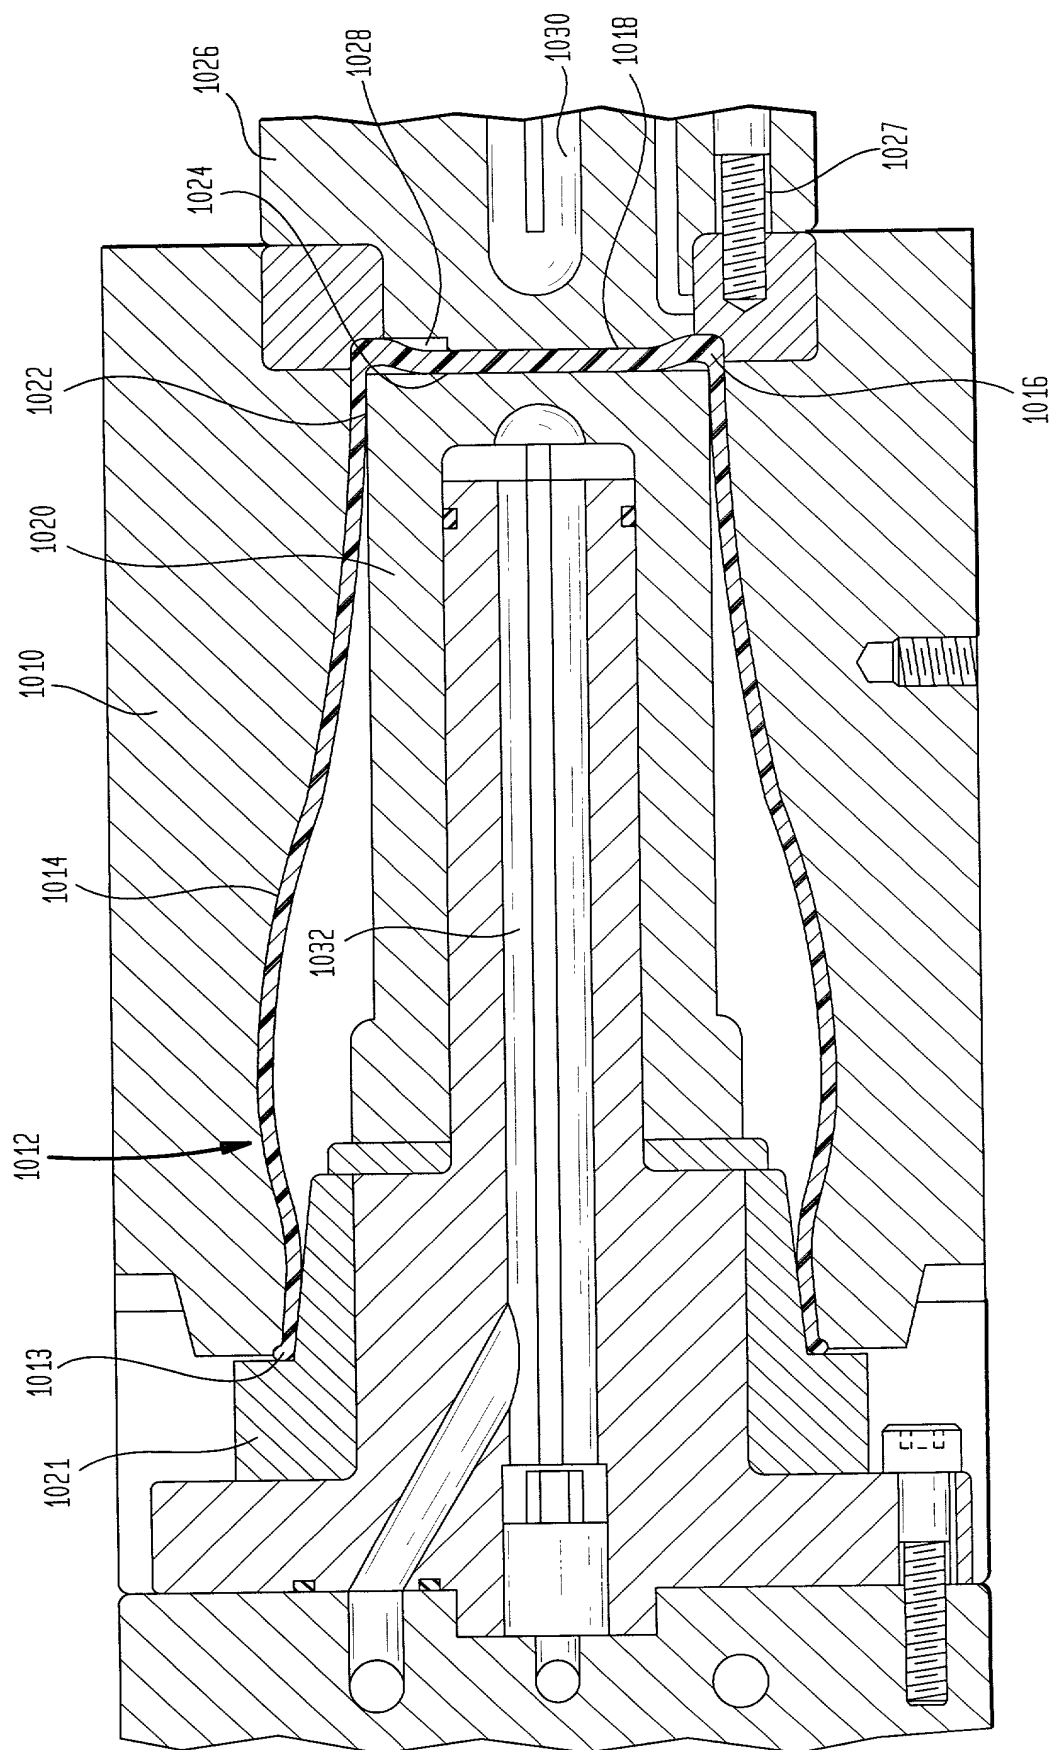

Docket No.
2160 (FJ-99-36)

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

INJECTION BLOW-MOLDED DISPOSABLE TUMBLER AND METHOD OF MAKING SAME

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International Application Number _____ and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

60/110,239

(Application Serial No.)

11/30/98

(Filing Date)

60/110,240

(Application Serial No.)

11/30/98

(Filing Date)

60/110,238

(Application Serial No.)

11/30/98

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Michael W. Ferrell - Registration No. 31,158

Send Correspondence to: **Michael W. Ferrell, Esq.**
Ferrell & Ferrell L.L.P.
90 Crystal Run Road, Suite 401
Middletown, New York 10941

Direct Telephone Calls to: *(name and telephone number)*
Michael W. Ferrell - 914-695-1553

Full name of sole or first inventor Erland R. Sandstrom	
Sole or first inventor's	Date
Residence 1317 Horne Avenue, Menasha, Wisconsin 54952, USA	
Citizenship USA	
Post Office Address Same as above	

Full name of second inventor, if any Brigitte K. Weigert	
Second inventor's signature	Date
Residence 733 W. Front Street, Appleton, Wisconsin 54914, USA	
Citizenship USA	
Post Office Address Same as above	

Full name of third inventor, if any

Donald C. McCarthy

Third inventor's signature

Date

Residence

911 Foxmoor Lane, Appleton, Wisconsin 54911, USA

Citizenship

USA

Post Office Address

Same as Above

Full name of fourth inventor, if any

Michael G. Thomas

Fourth inventor's signature

Date

Residence

140 Erksine Avenue, Suite 409, Toronto, Ontario, Canada M4P 1Z2

Citizenship

Canadian

Post Office Address

Same as Above

Full name of fifth inventor, if any

Michael A. Freek

Fifth inventor's signature

Date

Residence

86 Britannia Avenue, Bradford, Ontario, Canada L3Z 1A3

Citizenship

Canadian

Post Office Address

Same as Above

Full name of sixth inventor, if any

Sixth inventor's signature

Date

Residence

Citizenship

Post Office Address